

APPENDIX C

Boring/Well Log

Drilling Contractor: West Hazmat Drilling Corp.
 Drilling Equipment: CME-75
 Sampling Equipment: 2-inch I.D. Split Spoon
 Well Coordinates:
 Measuring Point Elevation:

Boring/Well No: **MW-1A** Page 1 of 1
 Boring Depth: 15 feet
 Boring Diameter: 7.5 inches
 Casing depth: 12.8 feet
 Casing Diameter: 2 inches

Well Construction	PID Reading	Blow Counts	Sample	Depth (feet)	Lithology	Soil Type	Description
Traffic-Rated Vault Box							Asphalt and Asphalt Base Rock
Locking Expansion Plug Concrete Seal				1		SM	SILTY SAND with GRAVEL (SM), Dusky Yellowish Brown (10YR2/2), Very Moist, Medium Dense. 15-25% gravel to 1-1/2 inches. 50% fine to medium sand. 25-35% moderate plasticity silt with clay
Hydrated Bentonite				2			
PVC Well Screen With 0.010-Inch Slots				3			
#2/12 Graded Sand Pack				4		SC	CLAYEY SAND (SC), Light Olive Gray (5Y5/2), Very Moist, Medium Dense. 50% fine to very fine sand. 50% moderate plasticity silt with clay.
			27	5			
			28	6		SM	SILTY SAND with GRAVEL (SM), Dark Yellowish Brown (10YR4/2), Dry, Dense. 20% gravel to 3/4 inch in diameter. 60% medium to coarse sand. 20% non-plastic silt.
			28	7			
Threaded End Cap				8			
Formation Collapse From 12.8 to 15 Feet				9		SW	SAND (SW), Dark Yellowish brown (10YR 4/2), Wet, Loose. 20-25% rounded gravel to 1-inch in diameter. 75-80% medium to coarse sand.
				10			
				11			
				12			
				13			
				14			
				15			
				16			Boring terminated at 15 feet below ground surface. Water level at 5.11 feet below measuring point on November 9, 1998.
				17			
				18			
				19			
				20			

Project: Ski Homewood Lift Maintenance UST Site
 Logged By: Peter Castro
 Drilling Date: November 6, 1998

Boring/Well Log

Drilling Contractor: West Hazmat Drilling Corp. Drilling Equipment: CME-75 Sampling Equipment: 2-inch I.D. Split Spoon Well Coordinates: Measuring Point Elevation:	Boring/Well No: MW-2N Page 1 of 1 Boring Depth: 17 feet Boring Diameter: 7.5 inches Casing depth: 13.5 feet Casing Diameter: 2 inches
---	--

Well Construction	PID Reading	Blow Counts	Sample	Depth (feet)	Lithology	Soil Type	Description
Traffic-Rated Vault Box							Asphalt and Asphalt Base Rock
Locking Expansion Plug Concrete Seal				1			
Hydrated Bentonite				2		SM	SILTY SAND with GRAVEL (SM), Dusky Yellowish Brown (10YR2/2), Wet, Medium Dense. 15-25% gravel to 1-1/2 inches. 50% fine to medium sand. 25-35% moderate plasticity silt with clay
				3			
PVC Well Screen With 0.010-Inch Slots				4		SC	CLAYEY SAND (SC), Light Olive Gray (5Y5/2), Very Moist to Wet, Dense. 50% fine to very fine sand. 50% moderate plasticity silt with clay.
				5			No sample recovery at 5 feet (rock in sampler shoe)
		50		6			
		5"		7			
#2/12 Graded Sand Pack				8		SW	SAND (SW), Dark Yellowish brown (10YR 4/2), Wet, Loose. 20-25% rounded gravel to 1-inch in diameter. 75-80% medium to coarse sand.
				9			
				10			
				11			
				12			
Threaded End Cap				13			
				14			
Formation Collapse From 13.5 to 17 Feet				15			
				16			
				17			Boring terminated at 17 feet below ground surface. Water level at 6.52 feet below measuring point on November 9, 1998.
				18			
				19			
				20			

	Project: <u>Ski Homewood Lift Maintenance UST Site</u> Logged By: <u>Peter Castro</u> Drilling Date: <u>November 6, 1998</u>
--	--

Boring/Well Log

Drilling Contractor: West Hazmat Drilling Corp. Drilling Equipment: CME-75 Sampling Equipment: 2-inch I.D. Split Spoon Well Coordinates: Measuring Point Elevation:	Boring/Well No: MW-3 Page 1 of 1 Boring Depth: 15 feet Boring Diameter: 7.5 inches Casing depth: 14.3 feet Casing Diameter: 2 inches
---	---

Well Construction	PID Reading	Blow Counts	Sample	Depth (feet)	Lithology	Soil Type	Description
Traffic-Rated Vault Box							
Locking Expansion Plug Concrete Seal				1			Asphalt and Asphalt Base Rock
Hydrated Bentonite				2		SM	SILTY SAND (SM), Dark Yellowish Brown (10YR4/2) Moist, Dense. Trace gravel. 60% fine to medium sand. 40% moderate plasticity fines.
PVC Well Screen With 0.010-Inch Slots				3			
#2/12 Graded Sand Pack				4			
Threaded End Cap				5			
			46	6			
			50	6			
			3.5"	6			
				7			
				8			
				9			
				10		SW	SAND (SW), Dark Yellowish brown (10YR 4/2), Wet, Loose. 20-25% rounded gravel to 1-inch in diameter. 75-80% medium to coarse sand.
				11			
				12			
				13			
				14			
				15			Boring terminated at 15 feet below ground surface. Water level at 6.89 feet below measuring point on November 9, 1998.
				16			
				17			
				18			
				19			
				20			

	Project: <u>Ski Homewood Lift Maintenance UST Site</u> Logged By: <u>Peter Castro</u> Drilling Date: <u>November 6, 1998</u>
--	--

Boring/Well Log

Drilling Contractor: West Hazmat Drilling Corp.
 Drilling Equipment: Limited Access Rig
 Sampling Equipment: 2-inch I.D. Split Spoon
 Well Coordinates:
 Measuring Point Elevation: 100.33


Boring/Well No: **MW-4** ✓ Page 1 of 1
 Boring Depth: 15 feet
 Boring Diameter: 6 inches
 Casing depth: 14.2 feet
 Casing Diameter: 2 inches

Well Construction	PID Reading	Blow Counts	Sample	Depth (feet)	Lithology	Soil Type	Description
Traffic-Rated Vault Box							
Locking Expansion Plug							Asphalt and Asphalt Base Rock
Concrete Seal				1		SC	CLAYEY SAND (SC), Dark Yellowish Brown (10YR4/2), Moist, Medium Dense. 70% fine to very fine sand. 30% medium plasticity clay with silt.
Hydrated Bentonite				2			
				3			
				4			
PVC Well Screen With 0.010-Inch Slots				5			
#2/12 Graded Sand Pack			36 50 3"	6			
				7			
				8			
				9		SW	SAND (SW), Dark Yellowish brown (10YR 4/2), Wet, Loose. 20-25% rounded gravel to 1-inch in diameter. 75-80% medium to coarse sand.
				10			
				11			
				12			
				13			
Threaded End Cap				14			
				15			Boring terminated at 15 feet below ground surface. Water level at 5.79 feet below measuring point on June 7, 1999.
				16			
				17			
				18			
				19			
				20			

Project: Ski Homewood Lift Maintenance UST Site
 Logged By: Peter Castro
 Drilling Date: May 28, 1999

Boring/Well Log

Drilling Contractor: West Hazmat Drilling Drilling Equipment: CME-75 Sampling Equipment: 2-Inch I.D. Split Spoon Well Coordinates: Measuring Point Elevation:	Boring/Well No: MW-4S Page 1 of 2 Boring Depth: 40 feet Boring Diameter: 8 inches Casing depth: 34 feet Casing Diameter: 2 inches
---	--

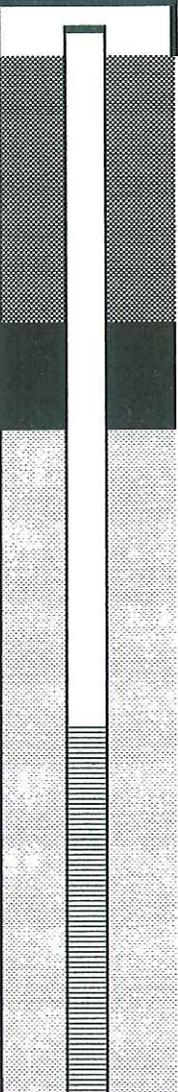
Well Construction	P/D Reading	Blow Counts	Sample	Depth (feet)	Lithology	Soil Type	Description
				1		ML	SANDY SILT (ML), Dusky Yellowish Brown (10YR2/2), Moist, Medium Stiff. Trace to 5% rounded gravel to 1 inch in diameter. 35-40% medium to fine sand. 55-60% silt (low plasticity).
	5.2			2			
				3			
				4			Gradational Contact
		13		5		ML	SANDY SILT (ML), Dark Yellowish Brown (10YR4/2), Moist, Medium Stiff to Stiff. Trace to 5% rounded gravel to 2-inches in diameter. 35% medium to fine sand. 60-65% silt/clay (low plasticity)
	4.8	19		6			
		27		7			
				8			Gradational Change
				9			
		5		10		ML	SANDY SILT (ML), Moderate Yellowish Brown (10YR5/4), Very Moist, Soft. Trace rounded gravel. 45% medium to fine sand. 55% non-plastic silt.
	4.5	7		11			
		9		12			
				13			Rocks and gravel below 13 feet.
				14			
		50		15			2-inch volcanic clast in sample.
	4.6	5"		16			
				17			
				18			
				19			
		19		20		SW	Well-Graded SAND (SW), Moderate to Dark Yellowish Brown (10YR5/4 to 10YR4/2), Wet, Medium Dense.
	4.6	20		20			

	Project: <u>Ski Homewood Fuel Facility</u> Logged By: <u>Peter Castro</u> Drilling Date: <u>5/20/1998</u>
--	---

Boring/Well Log

Drilling Contractor: West Hazmat Drilling
 Drilling Equipment: CME-75
 Sampling Equipment: 2-Inch I.D. Split Spoon
 Well Coordinates:
 Measuring Point Elevation:

Boring/Well No: **MW-45** Page 2 of 2
 Boring Depth: 40 feet
 Boring Diameter: 8 inches
 Casing depth: 34 feet
 Casing Diameter: 2 inches

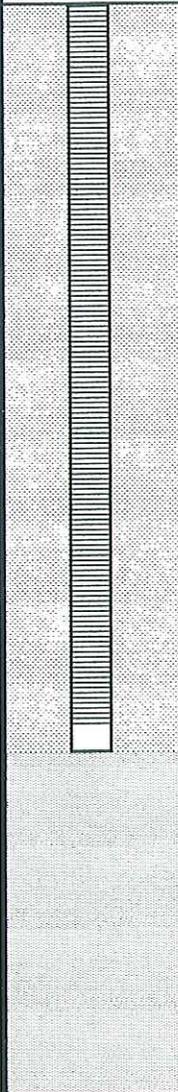
Well Construction	PID Reading	Blow Counts	Sample	Depth (feet)	Lithology	Soil Type	Description	
 <p style="margin-top: 40px;">PVC well screen with 0.020-inch slots</p> <p style="margin-top: 20px;">#3 RMC Lonestar Graded Sand Pack</p> <p style="margin-top: 20px;">Threaded End Cap</p> <p style="margin-top: 20px;">Formation Collapse From 34 to 40 Feet</p>	4.6	20 50	■	21		SW	Well-Graded SAND (SW), Moderate to Dark Yellowish Brown (10YR5/4 to 10YR4/2), Wet, Medium Dense. 10% gravel to 1 inch. 90% medium to coarse sand (rounded to subrounded grains). Gravel/cobbles at base.	
	4.2	19 32 50 3"	■	25		SM	SILTY SAND (SM), Light Olive Gray (5Y5/2), Dense 70% well-graded to gap-graded sand. 30% non-plastic silt.	
					22			
					23			
					24			
					26			
					27			
					28			
					29			
					30			
					31			
					32			
					33			
					34			
					35			
					36			
					37			
					38			
					39			
					40			Boring terminated at 40 feet below ground surface. Water level at 15.52 feet below ground surface on 5/21/98.

Project: Ski Homewood Fuel Facility
 Logged By: Peter Castro
 Drilling Date: 5/20/1998

Boring/Well Log

Drilling Contractor: West Hazmat Drilling
 Drilling Equipment: CME-75
 Sampling Equipment: 2-Inch I.D. Split Spoon
 Well Coordinates:
 Measuring Point Elevation:

Boring/Well No: **MW-5** Page 1 of 2
 Boring Depth: 40 feet
 Boring Diameter: 8 inches
 Casing depth: 34.5 feet
 Casing Diameter: 2 inches

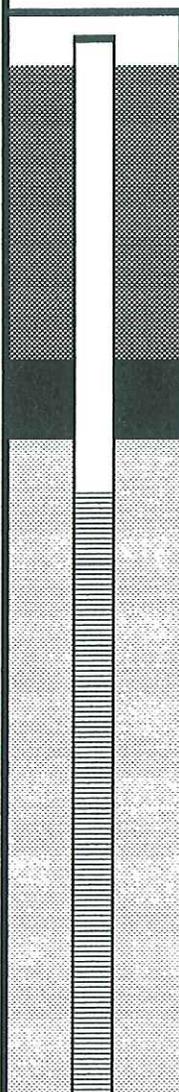Well Construction	PID Reading	Blow Counts	Sample	Depth (feet)	Lithology	Soil Type	Description
 <p>Traffic-Rated Well Vault Locking Expansion Plug</p> <p>Neat Cement Grout</p> <p>2-Inch PVC Blank Casing</p> <p>Bentonite Pellets (Hydrated)</p> <p>2-Inch PVC Well Screen with 0.020-Inch Slots</p> <p>#3 RMC Lonestar Graded Sand Pack</p>				1		ML	SANDY SILT (ML), Dusky Yellowish Brown (10YR2/2), Moist, Medium Stiff. Trace volcanic gravel to 1 inch in diameter. 40% fine to medium sand. 60% silt (low to moderate plasticity).
	8.6			2			
				3			
				4			Gradational/Approximate Contact
			9 12 17	5		ML	SANDY SILT (ML), Dark Yellowish Brown (10YR4/2), Moist, Medium Stiff. 10% gravel to 1 inch in diameter. 40% fine to medium sand. 50% low to moderate plasticity silt.
				6			
				7			
				8			
				9			
	6.2		50 6"	10		ML	SANDY SILT (ML) with GRAVEL, Moderate Yellowish Brown (10YR5/4), Wet, Stiff. 15% volcanic gravel to 1 inch in diameter. 30% fine to medium sand. 55% moderate to low plasticity silt.
				11			
				12			Unit contains thin (<1-inch) interbeds of silty sand.
				13			
				14			
	5.7		27 22 16	15		ML	SANDY SILT (ML), Moderate Yellowish Brown (10YR5/4), Wet, Medium Stiff. Trace gravel in sample. 40% medium to fine sand (coarser grains rounded). 60% moderate plasticity silt. Roots in sample.
				16			
				17			
				18			
				19			
			12 22	20		SM	SILTY SAND (SM), Moderate Yellowish Brown (10YR5/4), Wet, Medium Dense.

Project: Ski Homewood Fuel Facility
 Logged By: Peter Castro
 Drilling Date: 5/20/1998

Boring/Well Log


Drilling Contractor: West Hazmat Drilling
 Drilling Equipment: CME-75
 Sampling Equipment: 2-Inch I.D. Split Spoon
 Well Coordinates:
 Measuring Point Elevation:

Boring/Well No: **MW-5S** Page 2 of 2
 Boring Depth: 40 feet
 Boring Diameter: 8 inches
 Casing depth: 34 feet
 Casing Diameter: 2 inches

Well Construction	PID Reading	Blow Counts	Sample	Depth (feet)	Lithology	Soil Type	Description
<div style="display: flex; align-items: center;"> <div style="width: 150px;"> <p>PVC well screen with 0.020-inch slots</p> <p>#3 RMC Lonestar Graded Sand Pack</p> <p>Threaded End Cap</p> <p>Formation Collapse From 34.5 to 40 Feet</p> </div> </div>				21		SW	<p>SILTY SAND (SM), Moderate Yellowish Brown (10YR5/4), Wet, Medium Dense. 10% rounded gravel to 1 inch in diameter. 80% well-graded sand. 10% silt.</p> <p>Sand heaved 2 feet into augers when plug was removed to sample the boring. Removed augers and installed wood plug in drill bit. No undisturbed samples were collected from 25 to 40 feet.</p> <p>Trace to 5% rounded gravel to 2-inches in diameter (3/4 inch typical). Granitic source for gravel. Rounded to subrounded grains of quartz and feldspar with minor mica and mafic grains.</p> <p>Boring terminated at 40 feet below ground surface. Water level at 17.62 feet below measuring point on 5/21/98.</p>
				22			
				23			
				24			
				25			
				26			
				27			
				28			
				29			
				30			
				31			
				32			
				33			
				34			
				35			
				36			
				37			
				38			
				39			
				40			

Project: Ski Homewood Fuel Facility
 Logged By: Peter Castro
 Drilling Date: 5/20/1998

APPENDIX D

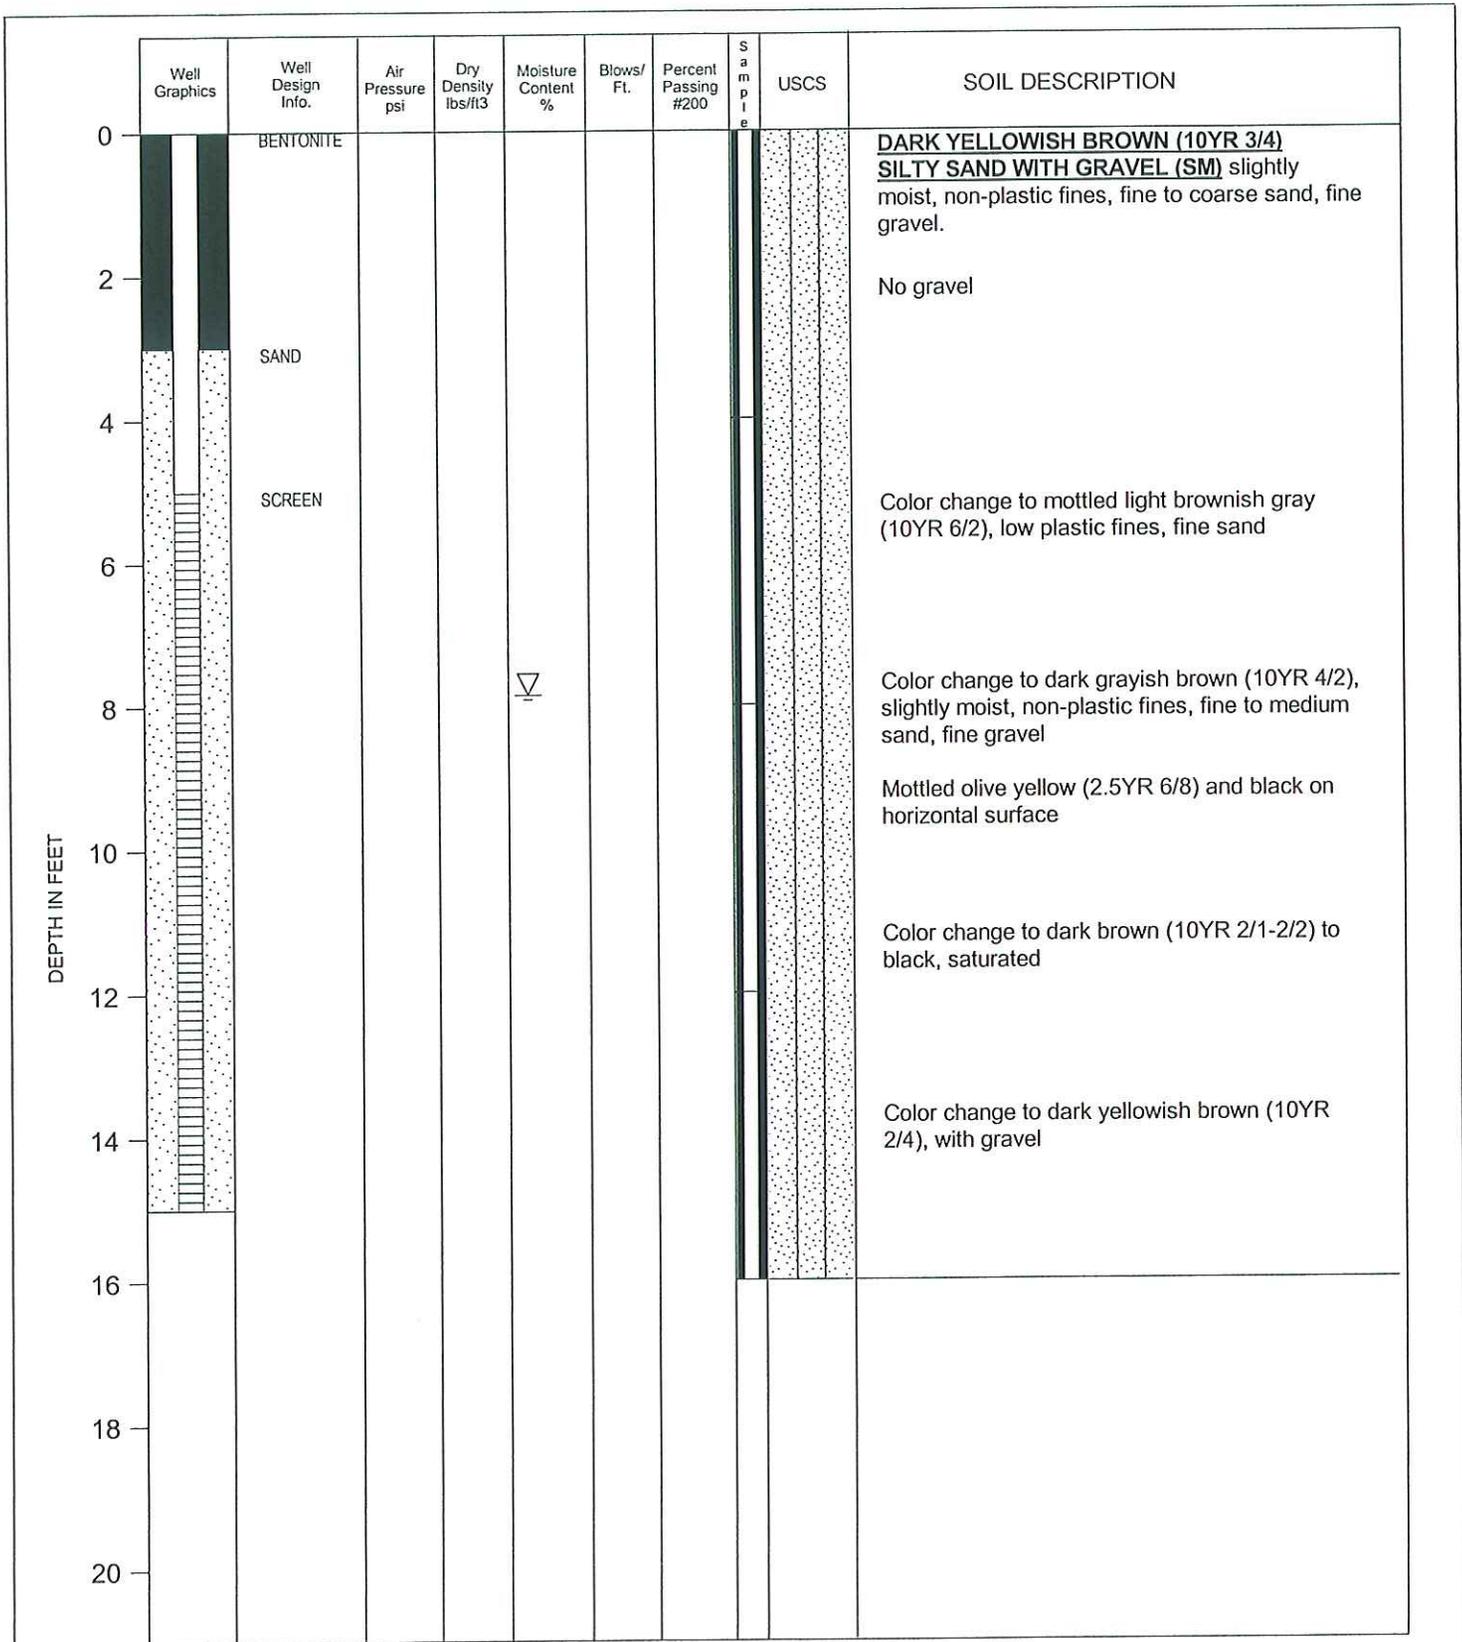

DEPTH IN FEET

0
2
4
6
8
10
12
14
16
18
20

DATE: 8-21-06
TOTAL DEPTH: 16.0 feet

LOGGED BY: B. WILLS
EQUIPMENT: GEOPROBE 5400

KLEINFELDER
4835 Longley Lane
Reno, NV 89502
PH. (775) 689-7800 Fax (775) 689-7810
www.kleinfelder.com

HOMWOOD GROUNDWATER INVESTIGATION
HOMWOOD, CALIFORNIA

PLATE

12

PROJECT NO. 74407.01

LOG OF GP-1

DEPTH IN FEET	Dry Density lb/ft ³	Moisture Content %	Blows/ Ft.	Percent Passing #200	S a m p l e	GRAPHIC LOG	SOIL DESCRIPTION
	0						
2							
4							
6							Color change to mottled dark yellowish brown (10YR 4/4), moist
8							Practical refusal at 8 feet. No free water encountered.
10							
12							
14							
16							
18							
20							

DATE: 8-21-06
TOTAL DEPTH: 8.0 feet

LOGGED BY: B. WILLS
EQUIPMENT: GEOPROBE 5400

KLEINFELDER
4835 Longley Lane
Reno, NV 89502
PH. (775) 689-7800 Fax (775) 689-7810
www.kleinfelder.com

HOMWOOD GROUNDWATER INVESTIGATION
HOMWOOD, CALIFORNIA

PLATE

13

PROJECT NO. 74407.01

LOG OF GP-2

DEPTH IN FEET	Dry Density lb/ft ³	Moisture Content %	Blows/ Ft.	Percent Passing #200	S a m p l e	GRAPHIC LOG	SOIL DESCRIPTION
	0						
2							
4							
6							Practical refusal at 6 feet. No free water encountered.
8							
10							
12							
14							
16							
18							
20							

DATE: 8-22-06
TOTAL DEPTH: 6.0 feet

LOGGED BY: B. WILLS
EQUIPMENT: GEOPROBE 5400

KLEINFELDER
4835 Longley Lane
Reno, NV 89502
PH. (775) 689-7800 Fax (775) 689-7810
www.kleinfelder.com


HOMWOOD GROUNDWATER INVESTIGATION
HOMWOOD, CALIFORNIA

LOG OF GP-2-RETRY

PLATE

14

PROJECT NO. 74407.01

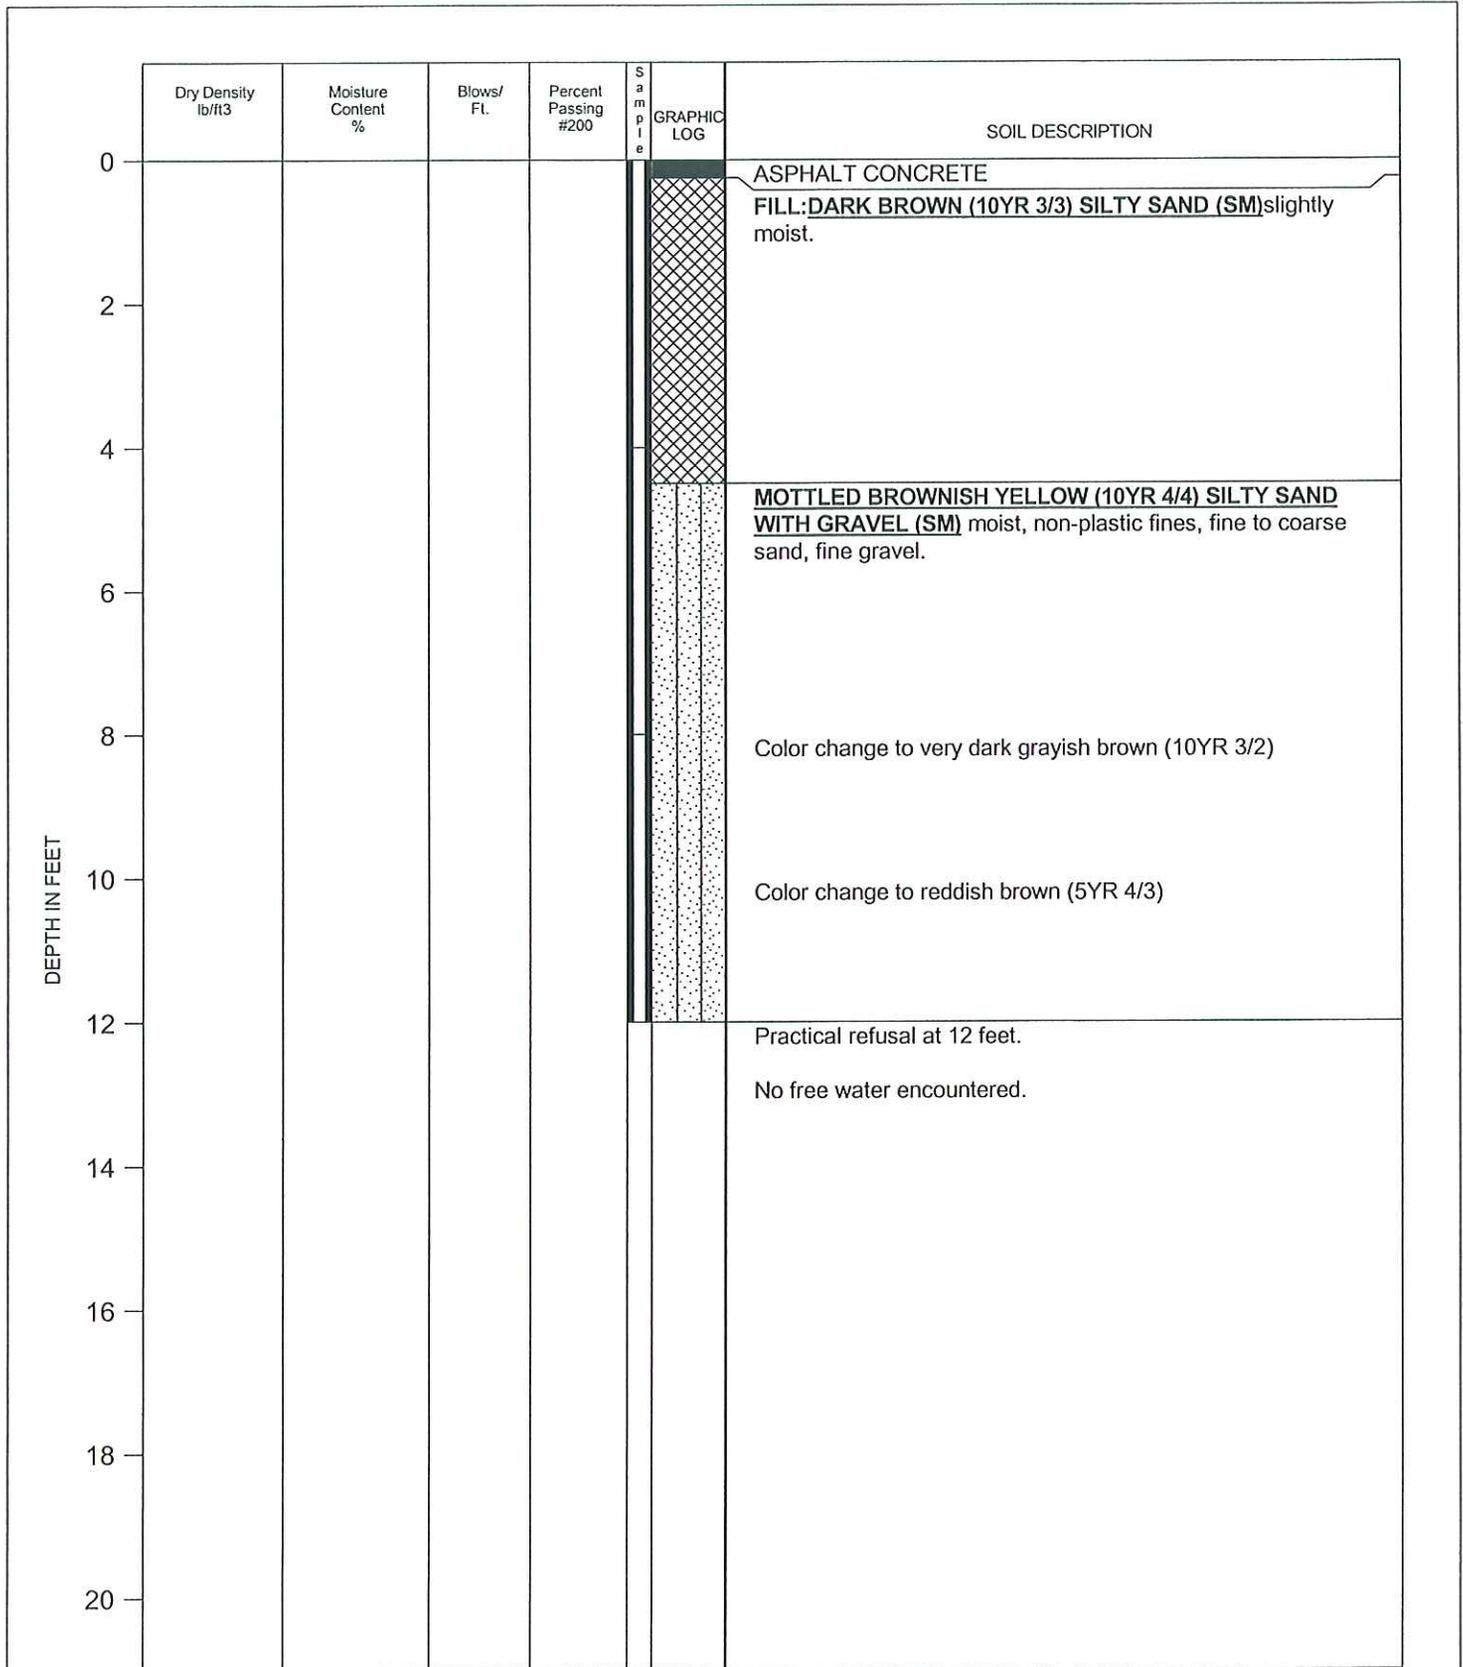

DATE: 8-22-06
TOTAL DEPTH: 12.0 feet

LOGGED BY: B. WILLS
EQUIPMENT: GEOPROBE 5400

KLEINFELDER
4835 Longley Lane
Reno, NV 89502
PH. (775) 689-7800 Fax (775) 689-7810
www.kleinfelder.com


HOMEWOOD GROUNDWATER INVESTIGATION
HOMEWOOD, CALIFORNIA

PLATE

15

PROJECT NO. 74407.01

LOG OF GP-3

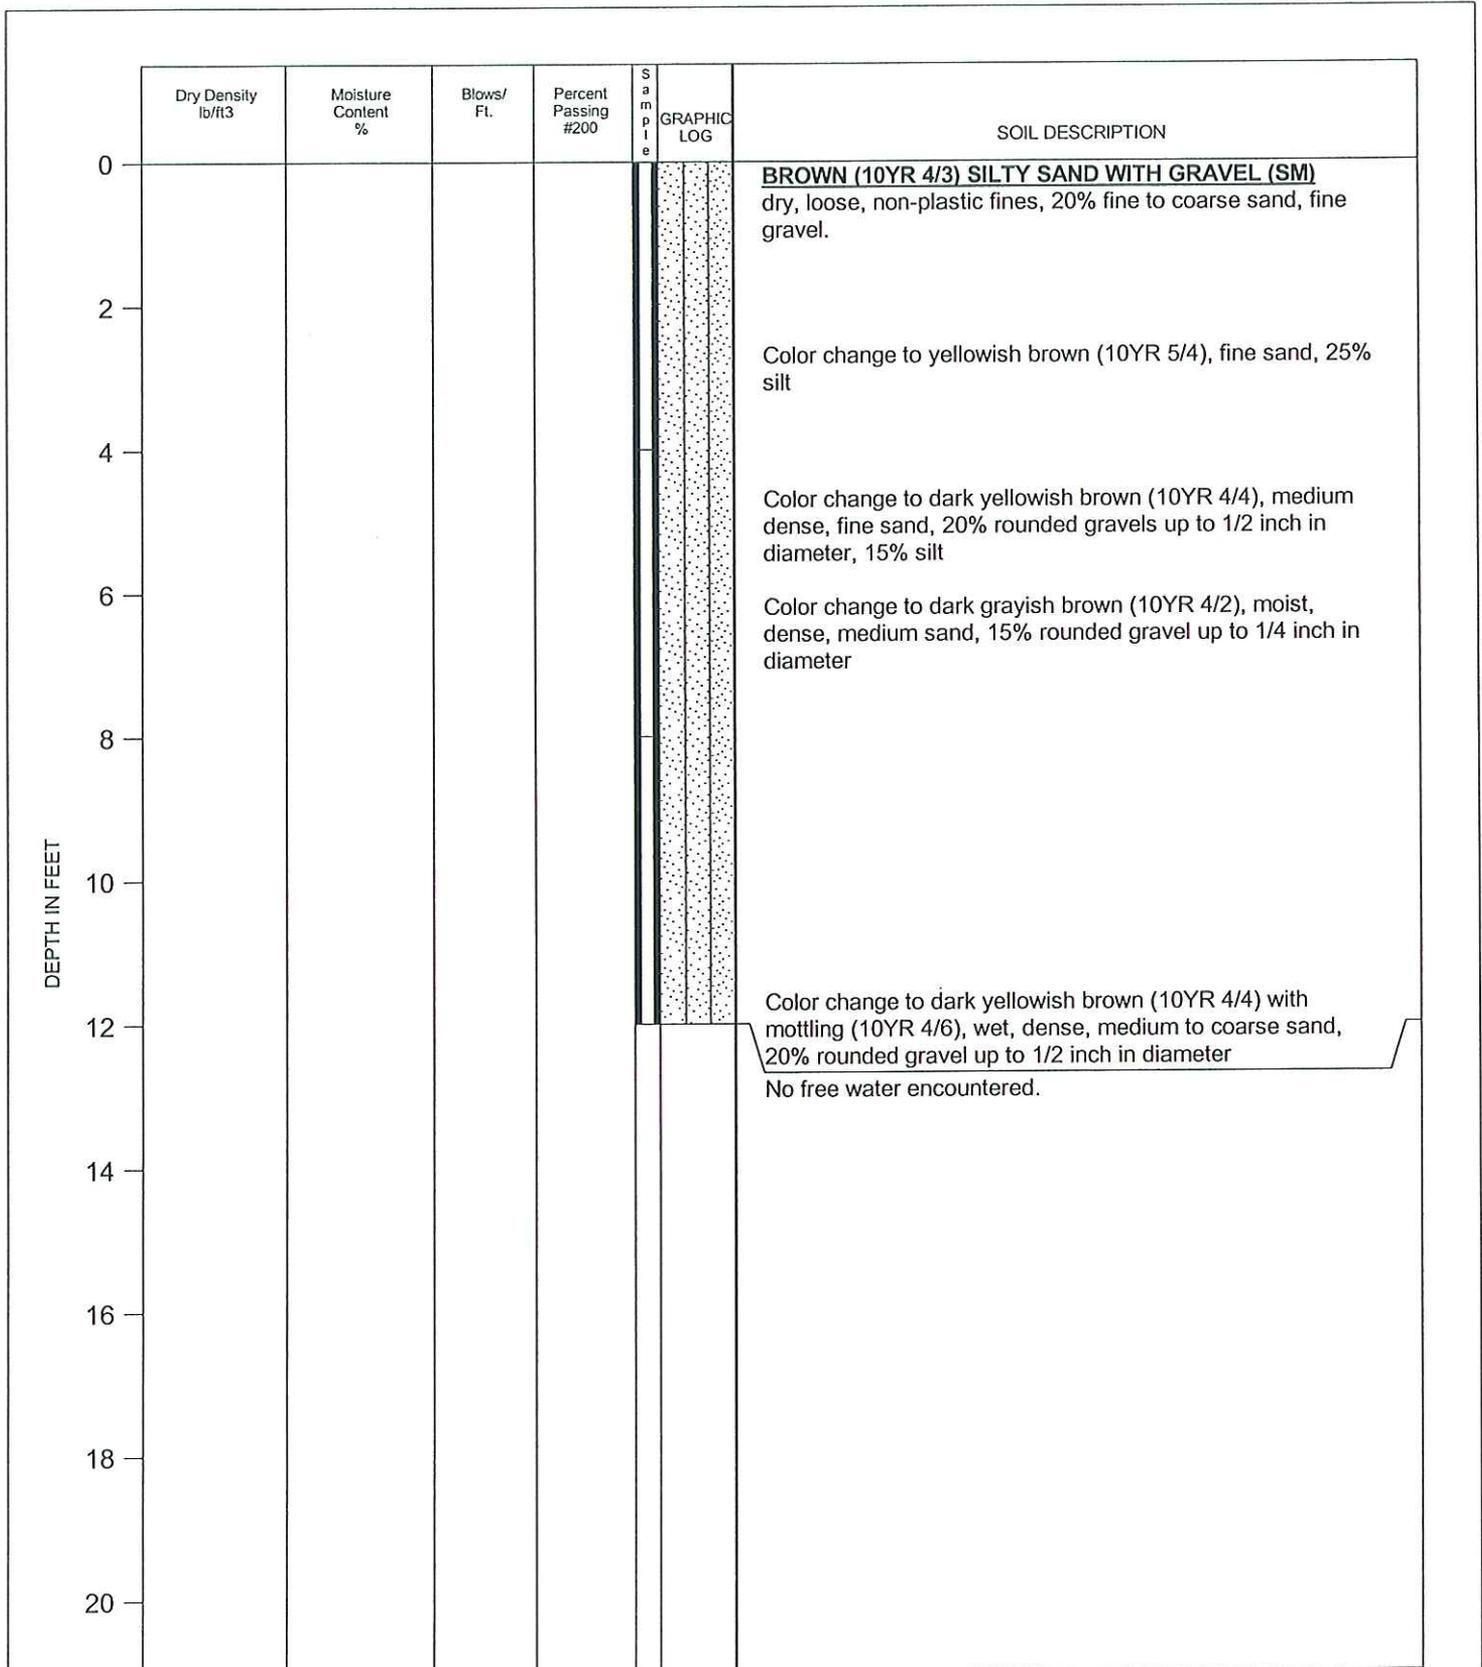

DATE: 8-23-06
TOTAL DEPTH: 12.0 feet

LOGGED BY: B. WILLS
EQUIPMENT: GEOPROBE 5400

KLEINFELDER
4835 Longley Lane
Reno, NV 89502
PH. (775) 689-7800 Fax (775) 689-7810
www.kleinfelder.com

HOMWOOD GROUNDWATER INVESTIGATION
HOMWOOD, CALIFORNIA

PLATE

16

PROJECT NO. 74407.01

LOG OF GP-4

DEPTH IN FEET	Dry Density lb/ft ³	Moisture Content %	Blows/ Fl.	Percent Passing #200	S a m p l e	GRAPHIC LOG	SOIL DESCRIPTION
	0						
2							Color change to yellowish brown (10YR 5/4)
4							
6							
6.5							Practical refusal at 6.5 feet.
8							No free water encountered.
10							
12							
14							
16							
18							
20							

DATE: 8-23-06
TOTAL DEPTH: 6.5 feet

LOGGED BY: B. WILLS
EQUIPMENT: GEOPROBE 5400


KLEINFELDER
4835 Longley Lane
Reno, NV 89502
PH. (775) 689-7800 Fax (775) 689-7810
www.kleinfelder.com

PROJECT NO. 74407.01

HOMEWOOD GROUNDWATER INVESTIGATION
HOMEWOOD, CALIFORNIA

LOG OF GP-5

PLATE
17

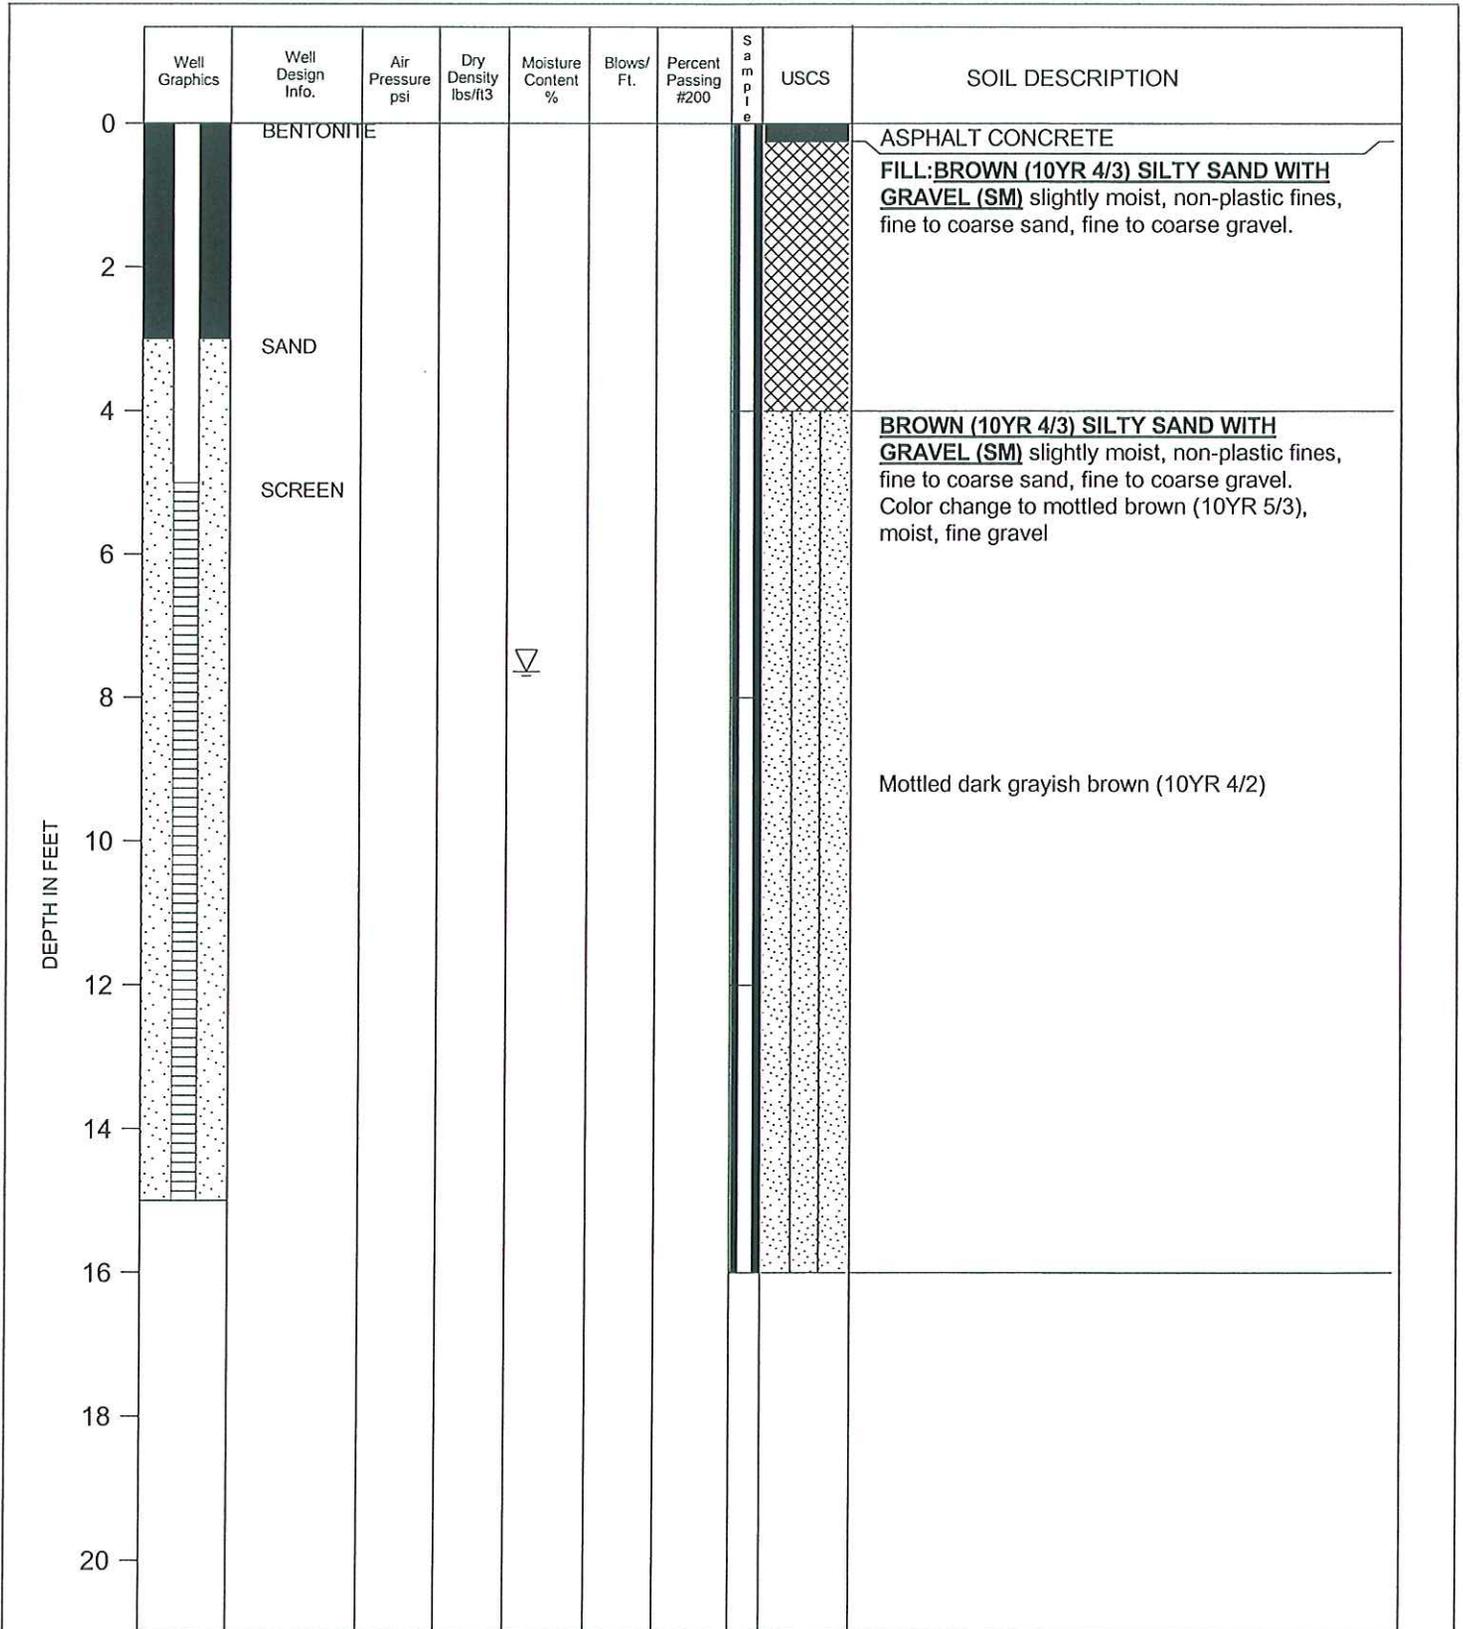

DATE: 8-23-06
TOTAL DEPTH: 16.0 feet

LOGGED BY: B. WILLS
EQUIPMENT: GEOPROBE 5400

KLEINFELDER
4835 Longley Lane
Reno, NV 89502
PH. (775) 689-7800 Fax (775) 689-7810
www.kleinfelder.com


HOMWOOD GROUNDWATER INVESTIGATION
HOMWOOD, CALIFORNIA

PLATE

18

PROJECT NO. 74407.01

LOG OF GP-6

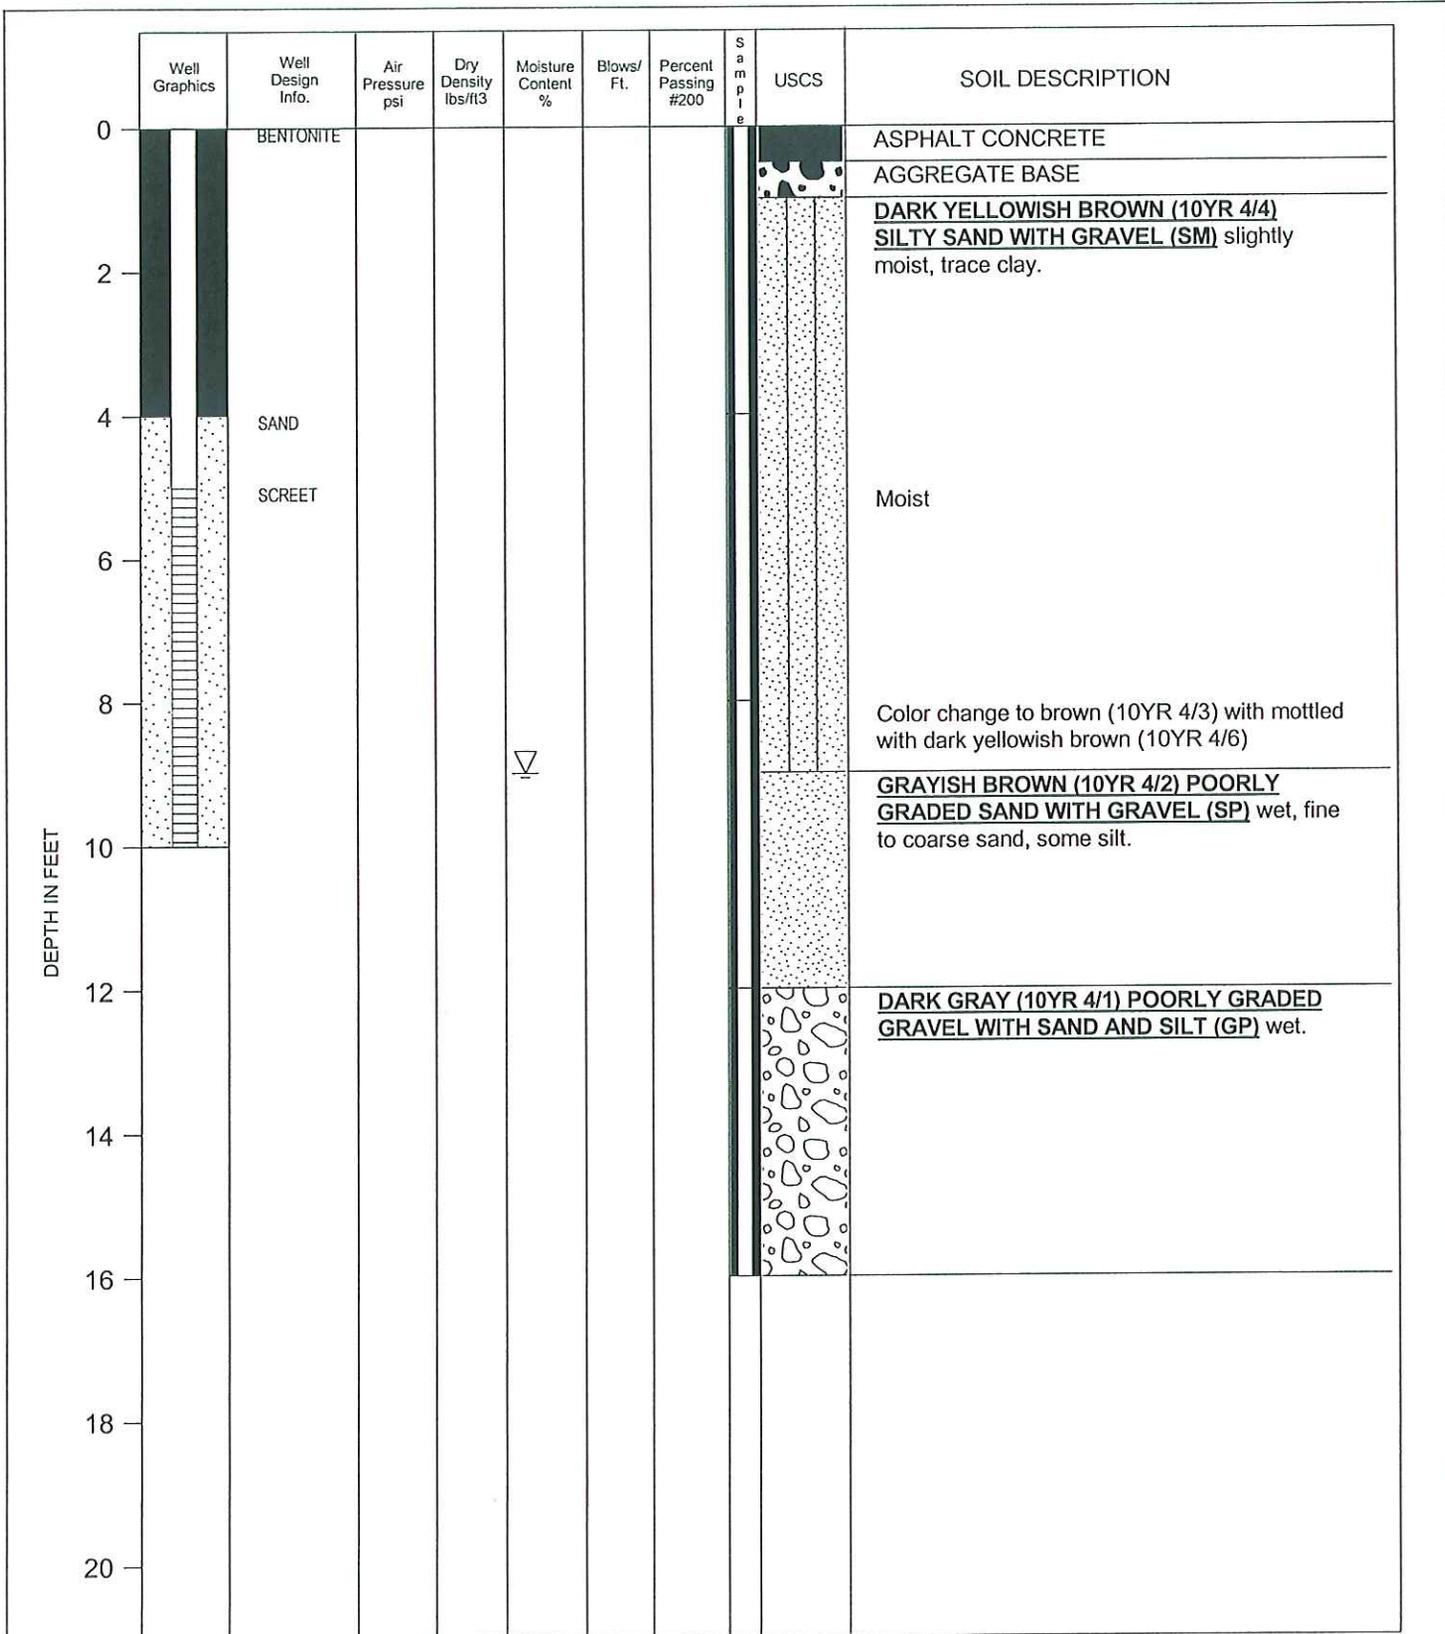

DATE: 8-23-06
 TOTAL DEPTH: 16.0 feet

LOGGED BY: B. WILLS
 EQUIPMENT: GEOPROBE 5400


KLEINFELDER
 4835 Longley Lane
 Reno, NV 89502
 PH. (775) 689-7800 Fax (775) 689-7810
 www.kleinfelder.com

PROJECT NO. 74407.01

HOMWOOD GROUNDWATER INVESTIGATION
 HOMWOOD, CALIFORNIA

LOG OF GP-7

PLATE
19

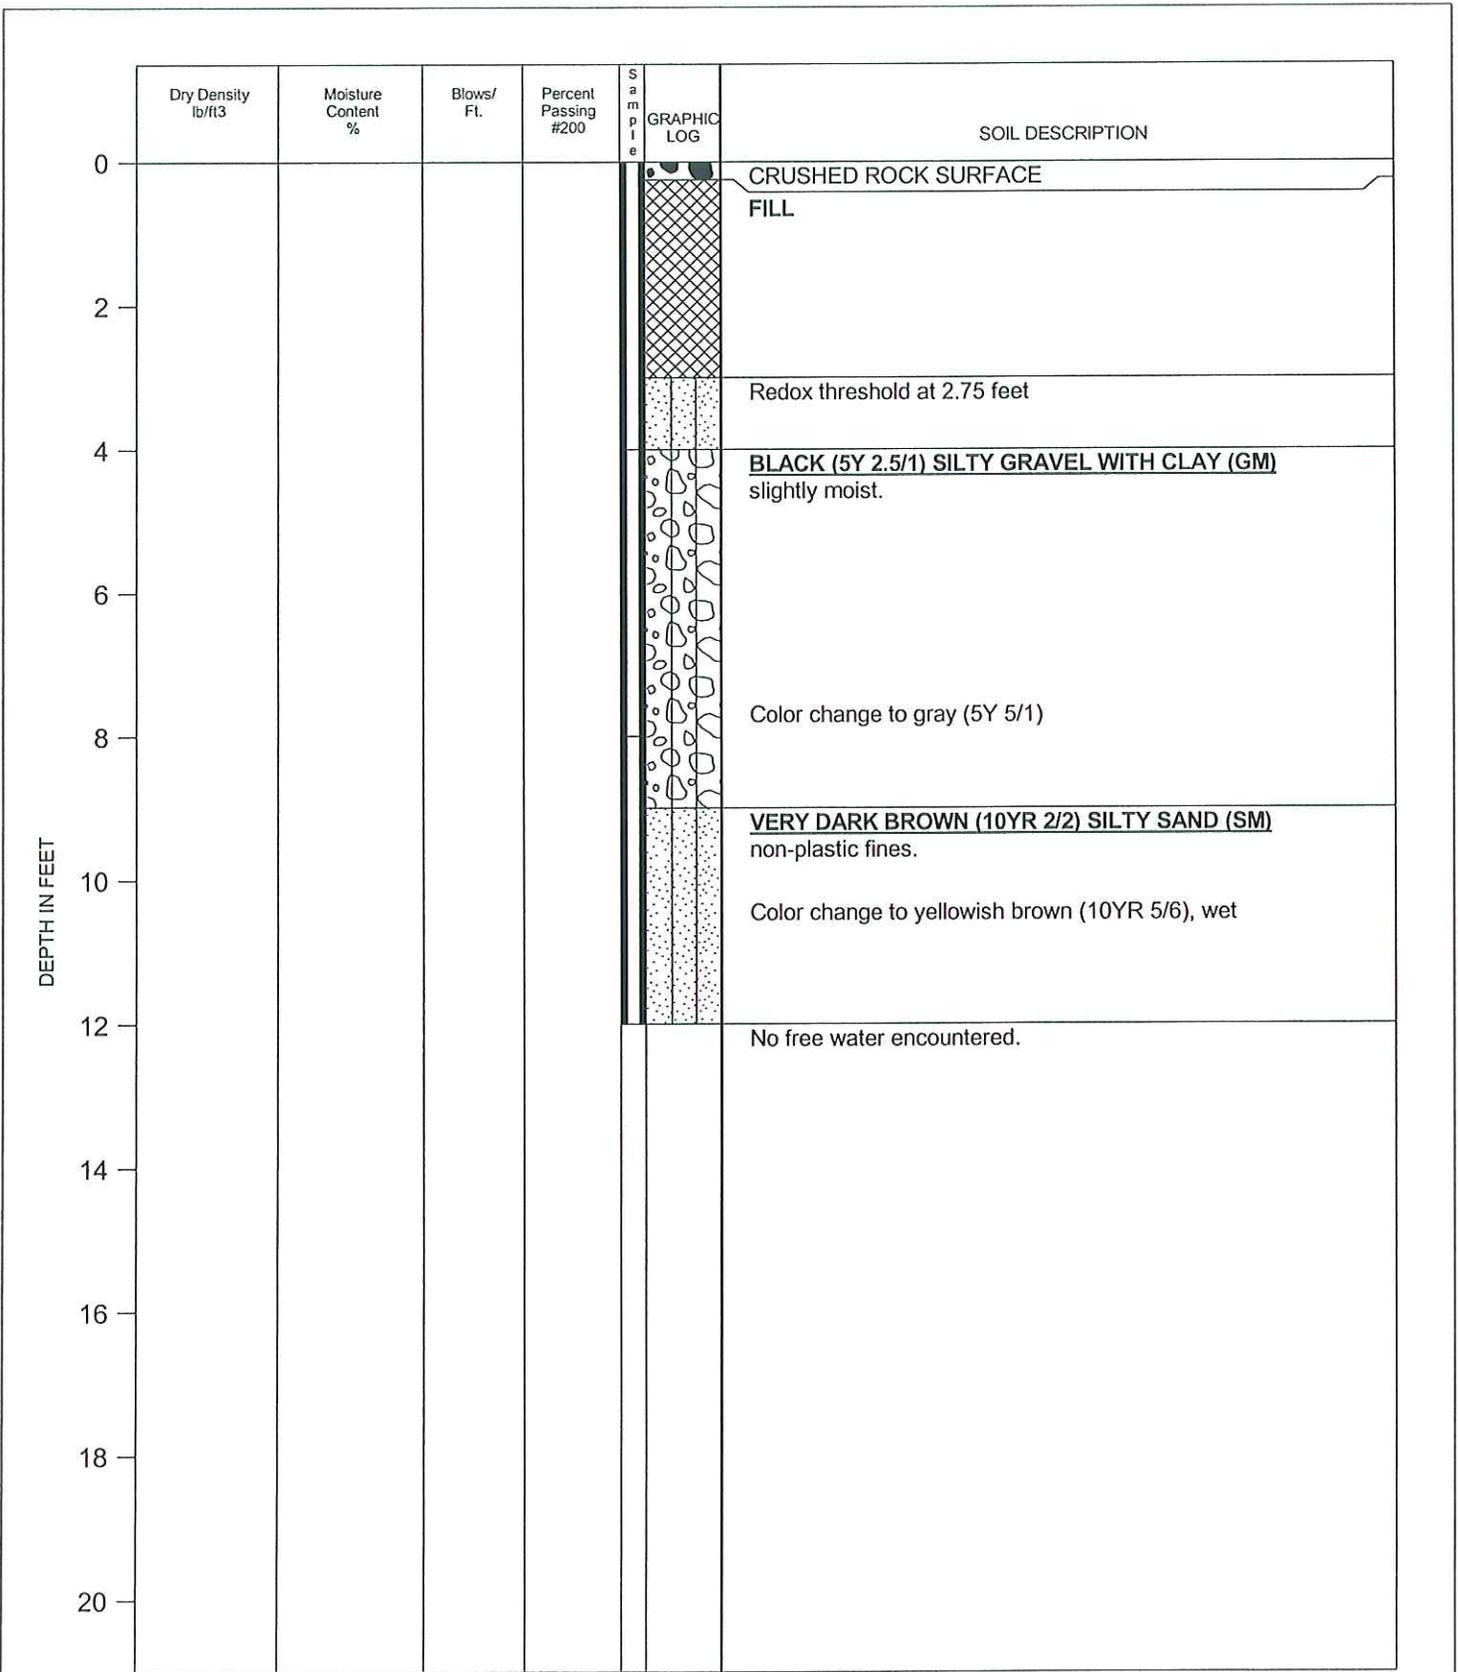

DATE: 8-23-06
TOTAL DEPTH: 12.0 feet

LOGGED BY: B. WILLS
EQUIPMENT: GEOPROBE 5400

KLEINFELDER
4835 Longley Lane
Reno, NV 89502
PH. (775) 689-7800 Fax (775) 689-7810
www.kleinfelder.com

HOMWOOD GROUNDWATER INVESTIGATION
HOMWOOD, CALIFORNIA

PLATE
21

PROJECT NO. 74407.01

LOG OF GP-9

DEPTH IN FEET	Dry Density lb/ft ³	Moisture Content %	Blows/ Ft.	Percent Passing #200	S a m p l e	G R A P H I C L O G	SOIL DESCRIPTION
							0
2							Practical refusal at 2 feet. No free water encountered.
4							
6							
8							
10							
12							
14							
16							
18							
20							

DATE: 8-23-06
TOTAL DEPTH: 2.0 feet

LOGGED BY: B. WILLS
EQUIPMENT: GEOPROBE 5400

KLEINFELDER
4835 Longley Lane
Reno, NV 89502
PH. (775) 689-7800 Fax (775) 689-7810
www.kleinfelder.com


HOMEWOOD GROUNDWATER INVESTIGATION
HOMEWOOD, CALIFORNIA

PLATE

22

PROJECT NO. 74407.01

LOG OF GP-10

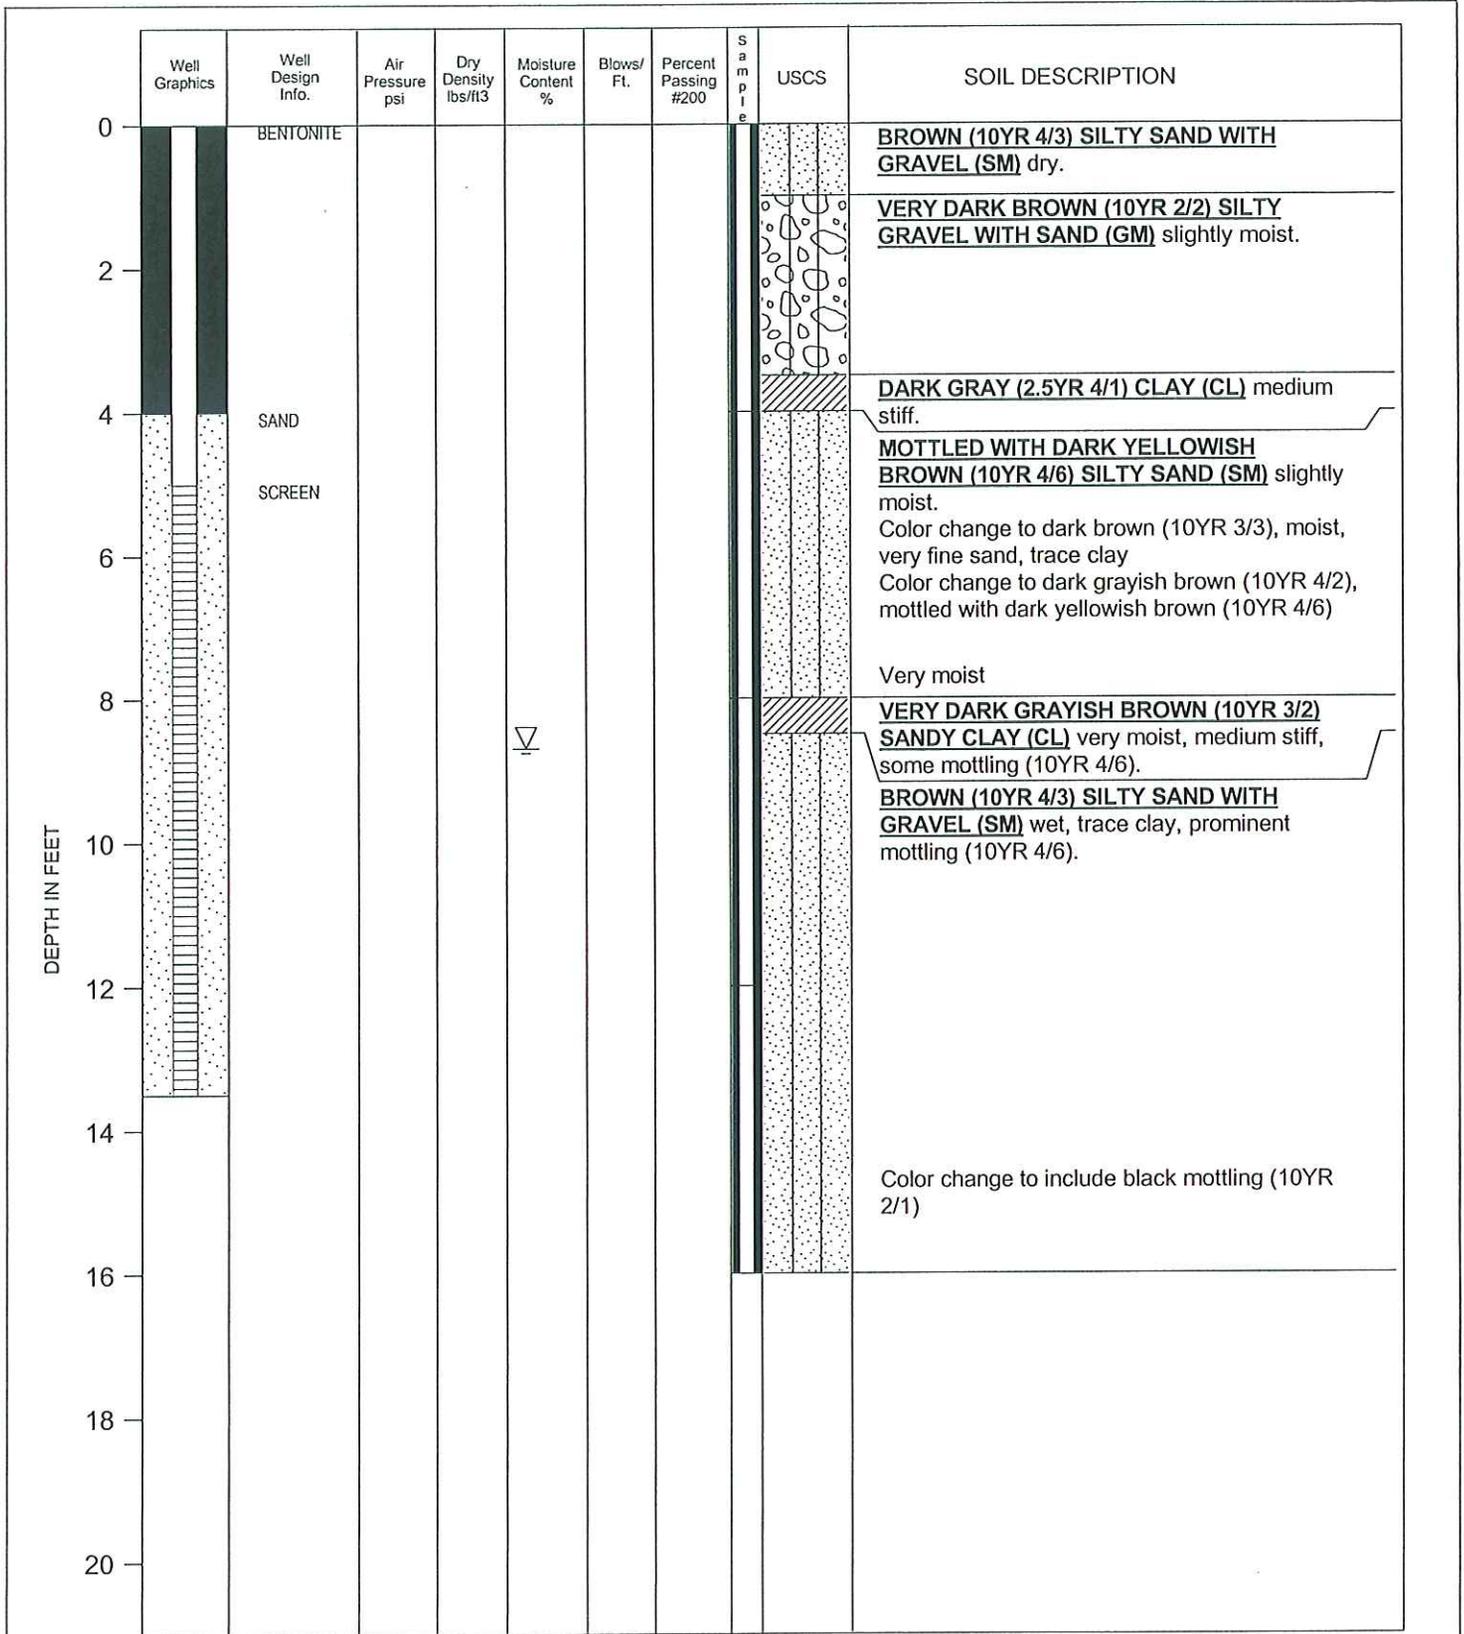

DATE: 8-23-06
 TOTAL DEPTH: 16.0 feet

LOGGED BY: B. WILLS
 EQUIPMENT: GEOPROBE 5400

KLEINFELDER
 4835 Longley Lane
 Reno, NV 89502
 PH. (775) 689-7800 Fax (775) 689-7810
 www.kleinfelder.com


HOMWOOD GROUNDWATER INVESTIGATION
HOMWOOD, CALIFORNIA

PLATE

24

PROJECT NO. 74407.01

LOG OF GP-12

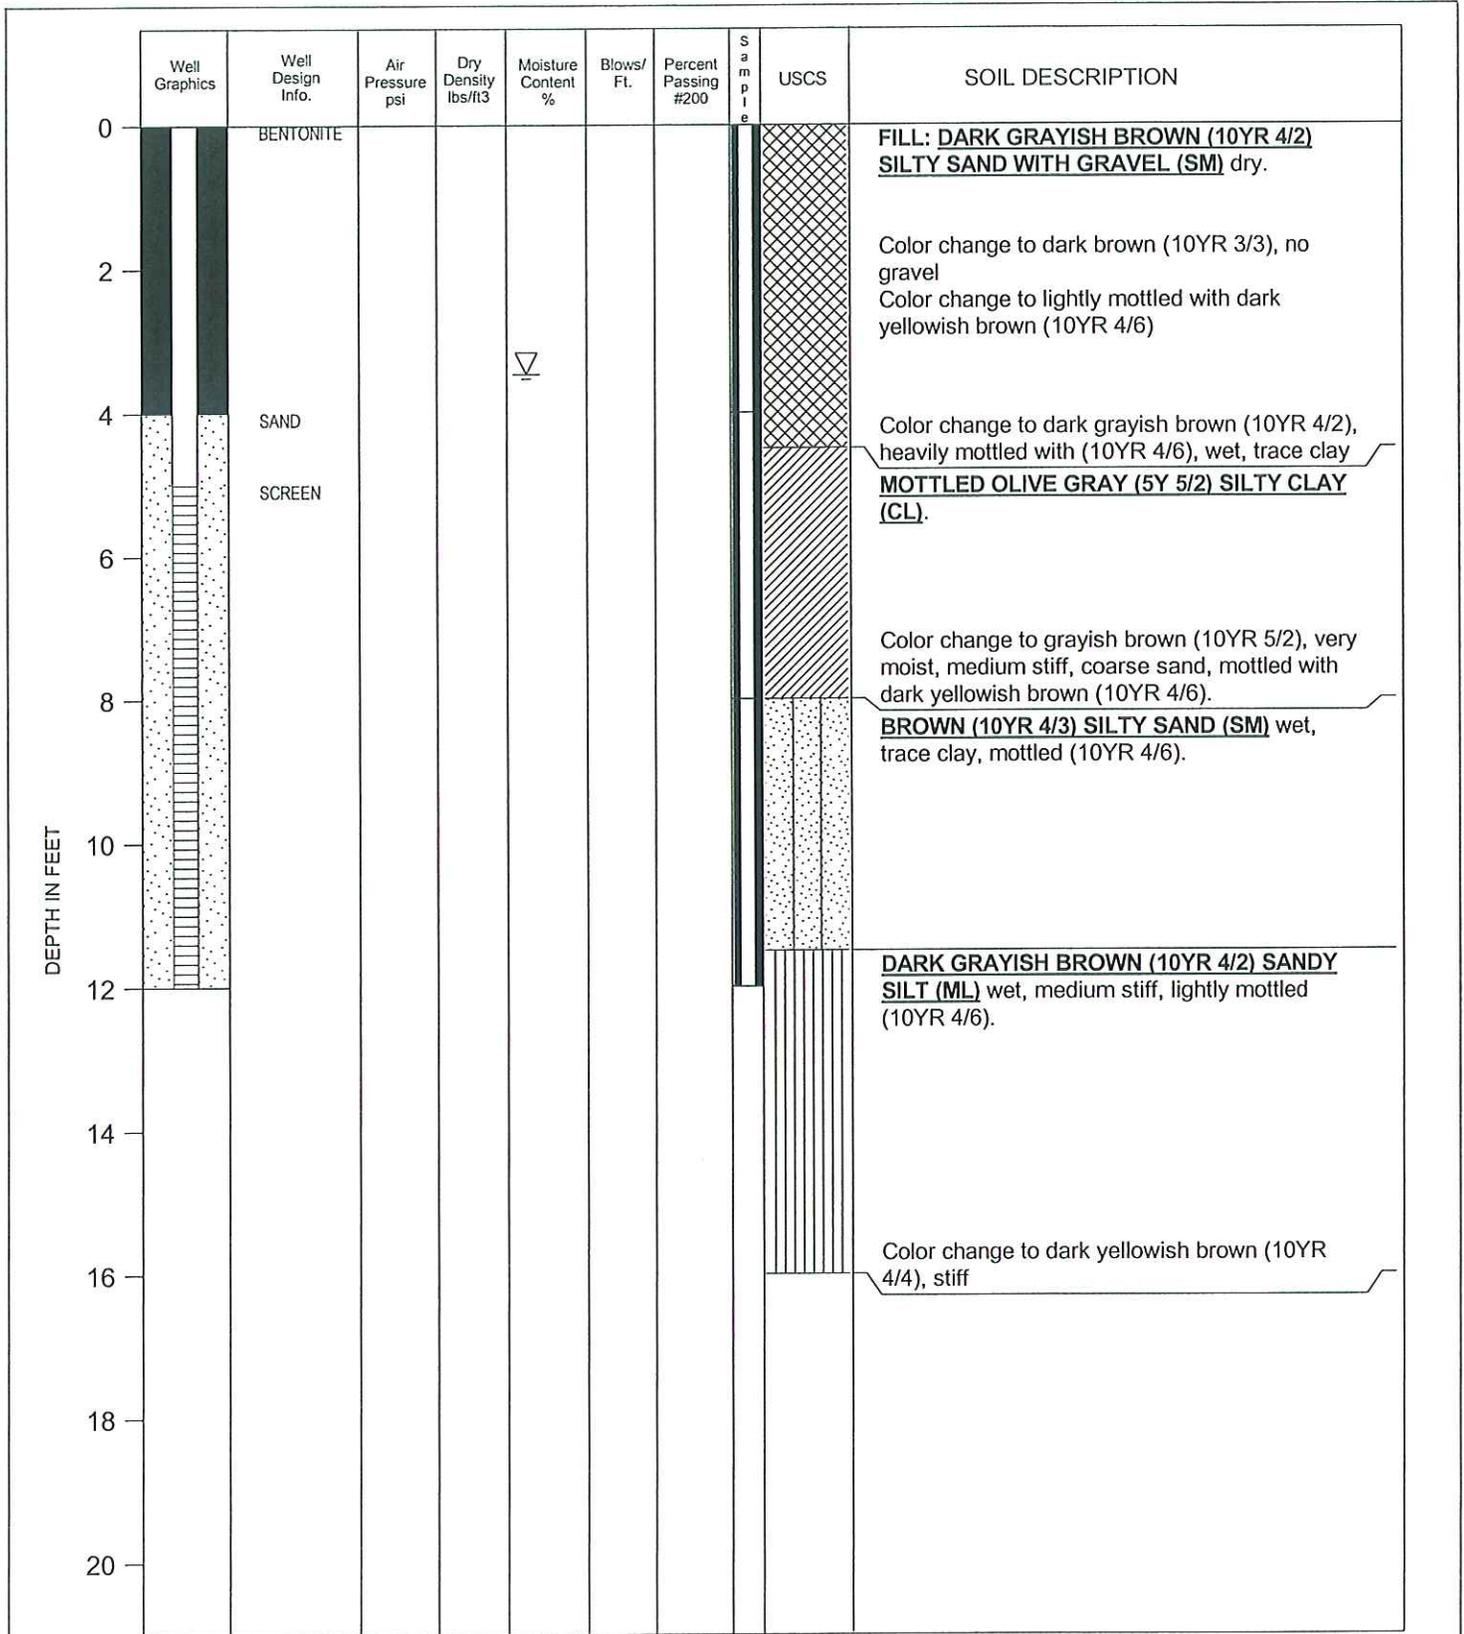

DATE: 8-24-06
TOTAL DEPTH: 16.0 feet

LOGGED BY: B. WILLS
EQUIPMENT: GEOPROBE 5400

KLEINFELDER
4835 Longley Lane
Reno, NV 89502
PH. (775) 689-7800 Fax (775) 689-7810
www.kleinfelder.com


HOMWOOD GROUNDWATER INVESTIGATION
HOMWOOD, CALIFORNIA

PLATE

25

PROJECT NO. 74407.01

LOG OF GP-13

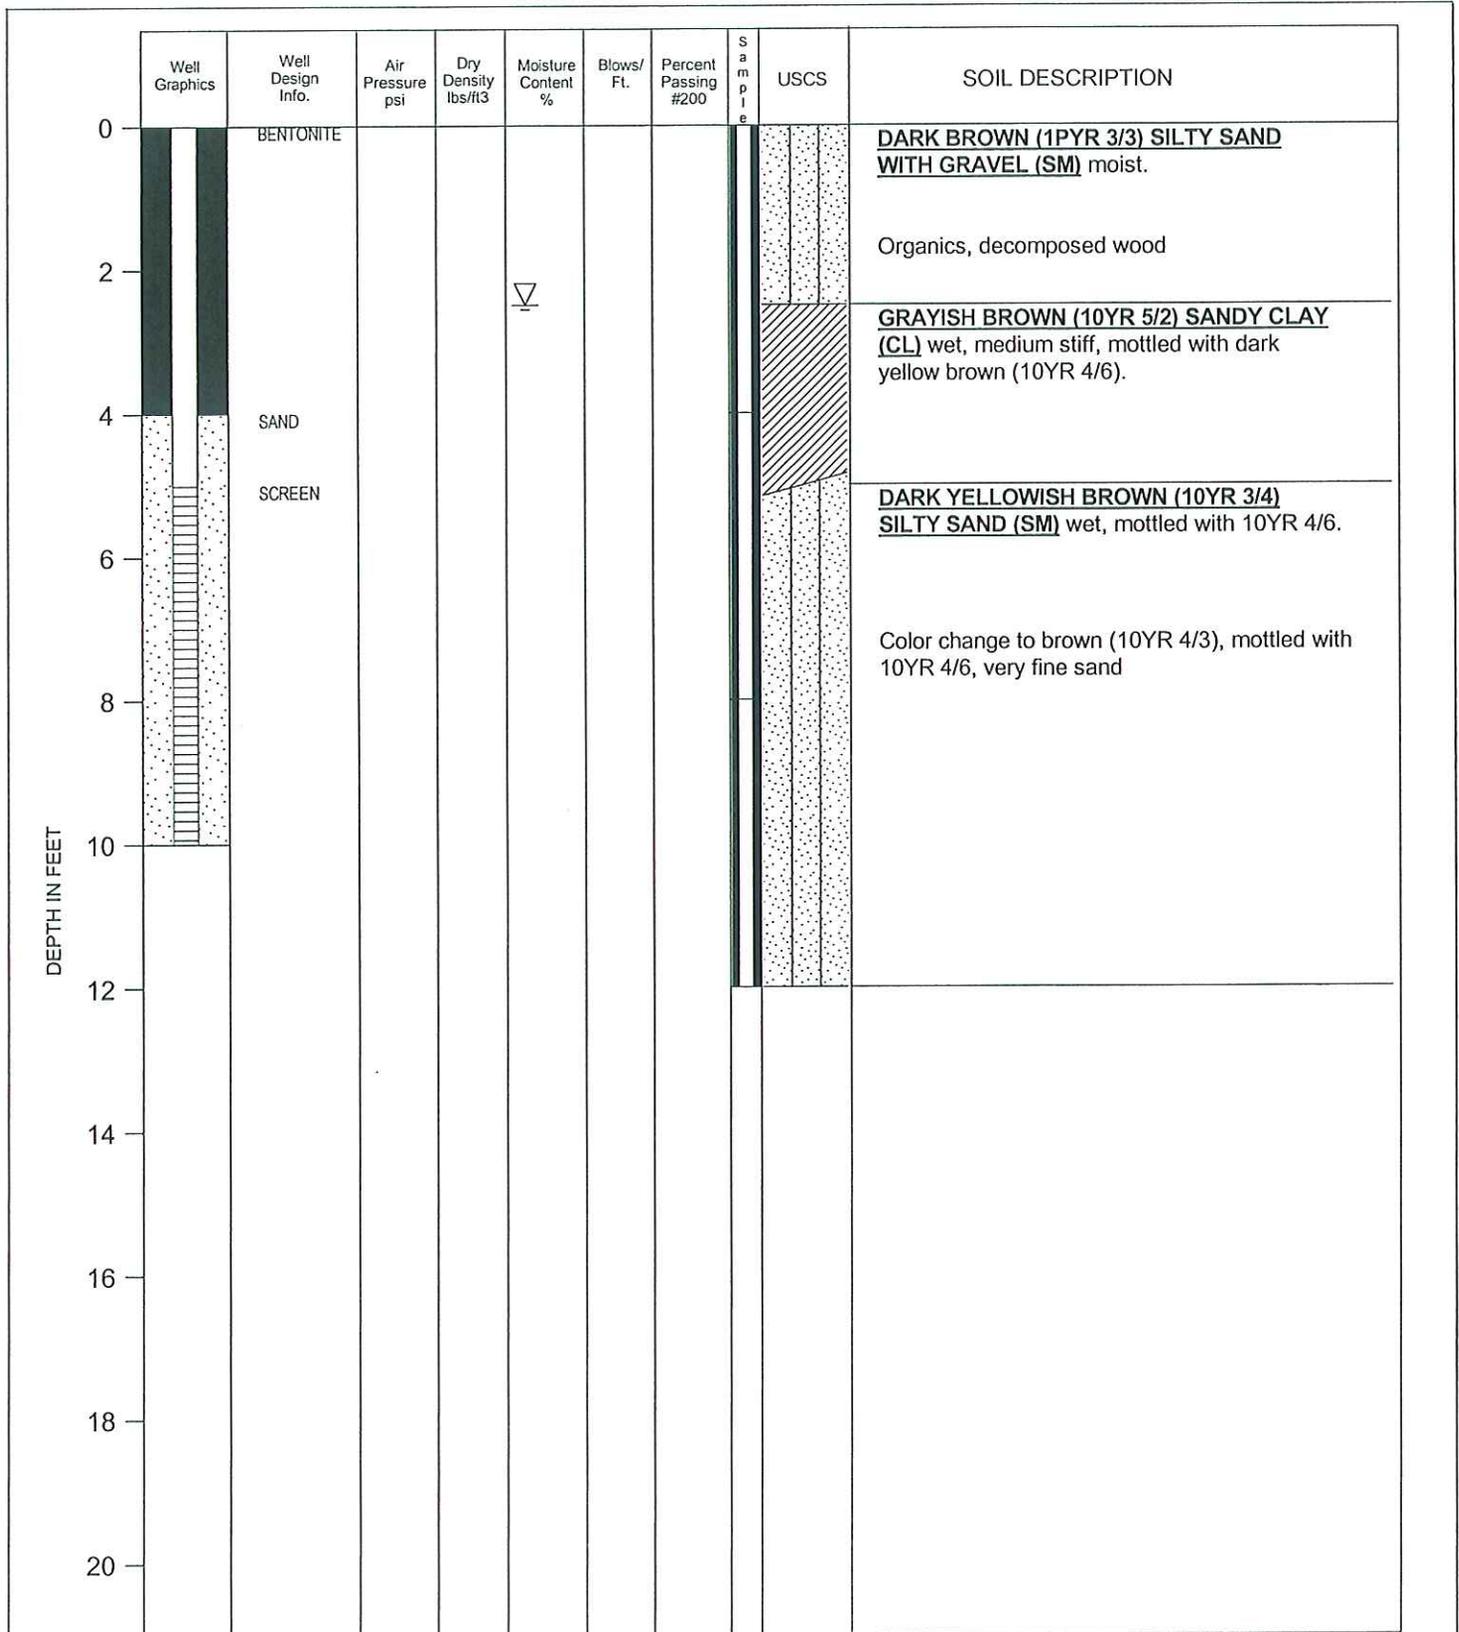

DATE: 8-24-06
 TOTAL DEPTH: 12.0 feet

LOGGED BY: B. WILLS
 EQUIPMENT: GEOPROBE 5400

KLEINFELDER
 4835 Longley Lane
 Reno, NV 89502
 PH. (775) 689-7800 Fax (775) 689-7810
 www.kleinfelder.com


HOMWOOD GROUNDWATER INVESTIGATION
 HOMWOOD, CALIFORNIA

PLATE

26

PROJECT NO. 74407.01

LOG OF GP-14

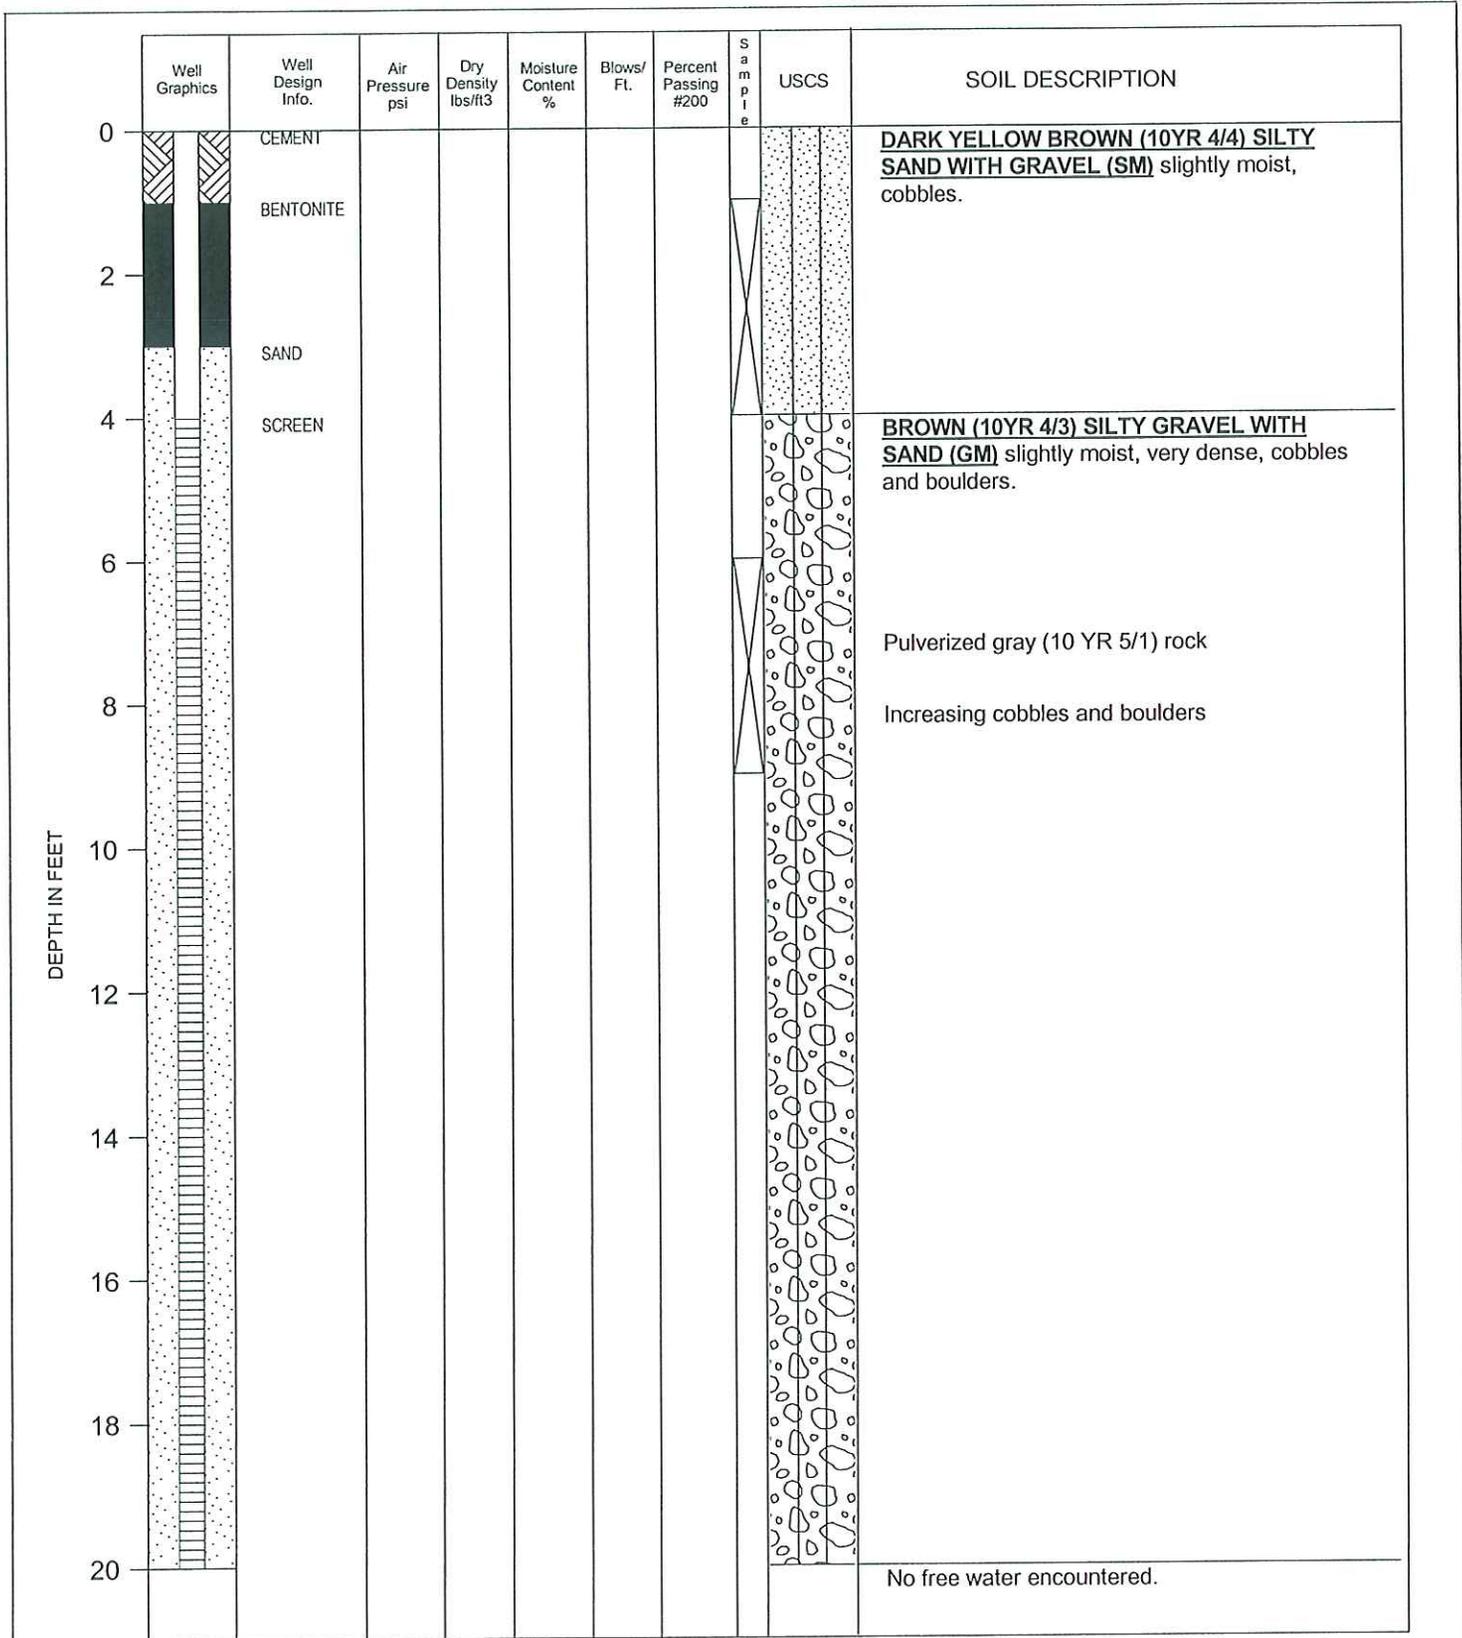

DATE: 10-3-06
TOTAL DEPTH: 20.0 feet

LOGGED BY: P.TOUSIGNANT
EQUIPMENT: INGERSOLL RAND A-400

KLEINFELDER
4835 Longley Lane
Reno, NV 89502
PH. (775) 689-7800 Fax (775) 689-7810
www.kleinfelder.com

PROJECT NO. 74407.01

HOMWOOD GROUNDWATER INVESTIGATION
HOMWOOD, CALIFORNIA

LOG OF GP-15

PLATE
27

DEPTH IN FEET	Dry Density lb/ft3	Moisture Content %	Blows/ Ft.	Percent Passing #200	S a m p l e	GRAPHIC LOG	SOIL DESCRIPTION
	0						
2							
4							Practical refusal at 3 feet. No free water encountered.
6							
8							
10							
12							
14							
16							
18							
20							

DATE: 8-24-06
TOTAL DEPTH: 3.0 feet

LOGGED BY: B. WILLS
EQUIPMENT: GEOPROBE 5400

KLEINFELDER
4835 Longley Lane
Reno, NV 89502
PH. (775) 689-7800 Fax (775) 689-7810
www.kleinfelder.com

HOMEWOOD GROUNDWATER INVESTIGATION
HOMEWOOD, CALIFORNIA

PLATE

28

PROJECT NO. 74407.01

LOG OF GP-15-REFUSAL

DEPTH IN FEET	Dry Density lb/ft ³	Moisture Content %	Blows/ Ft.	Percent Passing #200	Sample	GRAPHIC LOG	SOIL DESCRIPTION
	0						
2							Color change to dark yellowish brown (10YR 3/6), slightly moist, with cobbles and boulders
4							Practical refusal at 3 feet. No free water encountered.
6							
8							
10							
12							
14							
16							
18							
20							
DATE: 8-23-06		LOGGED BY: B. WILLS		EQUIPMENT: GEOPROBE 5400			
TOTAL DEPTH: 3.0 feet							


KLEINFELDER
 4835 Longley Lane
 Reno, NV 89502
 PH. (775) 689-7800 Fax (775) 689-7810
 www.kleinfelder.com

PROJECT NO. 74407.01

HOMEWOOD GROUNDWATER INVESTIGATION
 HOMEWOOD, CALIFORNIA

LOG OF GP-16

PLATE
29

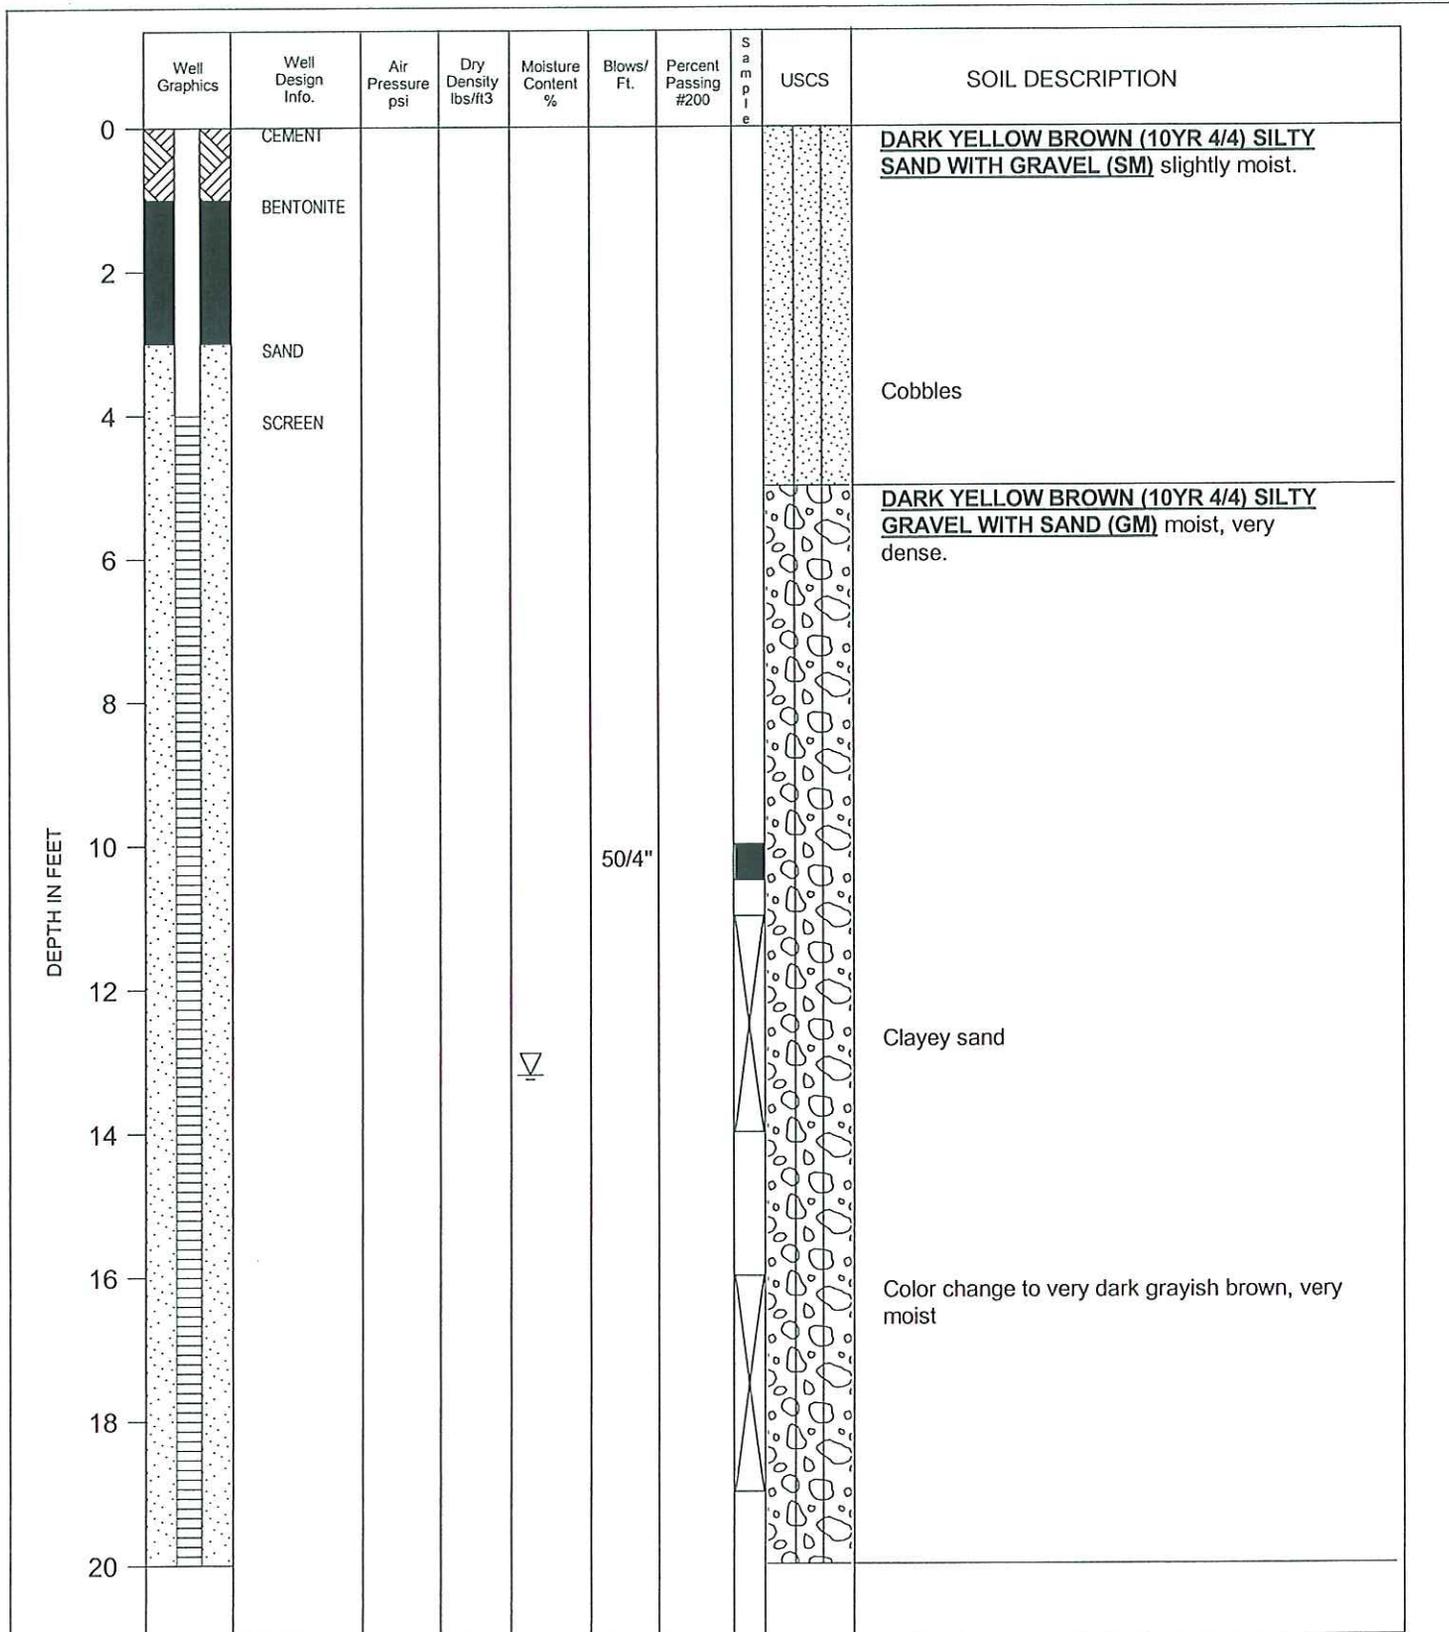

DATE: 10-3-06
TOTAL DEPTH: 20.0 feet

LOGGED BY: P.TOUSIGNANT
EQUIPMENT: INGERSOLL RAND A-400

KLEINFELDER
4835 Longley Lane
Reno, NV 89502
PH. (775) 689-7800 Fax (775) 689-7810
www.kleinfelder.com

HOMWOOD GROUNDWATER INVESTIGATION
HOMWOOD, CALIFORNIA

PLATE

30

PROJECT NO. 74407.01

LOG OF GP-17

DEPTH IN FEET	Dry Density lb/ft ³	Moisture Content %	Blows/ Ft.	Percent Passing #200	S a m p l e G R A P H I C L O G	SOIL DESCRIPTION
						0
2						Color change to dark yellowish brown (10YR 3/6), slightly moist
4						With cobbles
6						Practical refusal at 6.5 feet.
8						No free water encountered.
10						
12						
14						
16						
18						
20						
DATE: 8-23-06		LOGGED BY: B. WILLS				
TOTAL DEPTH: 3.5 feet		EQUIPMENT: GEOPROBE 5400				

KLEINFELDER
 4835 Longley Lane
 Reno, NV 89502
 PH. (775) 689-7800 Fax (775) 689-7810
 www.kleinfelder.com

HOMEWOOD GROUNDWATER INVESTIGATION
HOMEWOOD, CALIFORNIA

PLATE

31

PROJECT NO. 74407.01

LOG OF GP-17-REFUSAL

DEPTH IN FEET	Dry Density lb/ft ³	Moisture Content %	Blows/ Ft.	Percent Passing #200	S a m p l e G R A P H I C L O G	SOIL DESCRIPTION
						0
2						With cobbles
4						Color change to dark brown (10yr 3/3) Color change to dark brown (7.3YR 3/3)
6						
8						Practical refusal at 8 feet. No free water encountered.
10						
12						
14						
16						
18						
20						
DATE: 8-23-06		LOGGED BY: B. WILLS				
TOTAL DEPTH: 8.0 feet		EQUIPMENT: GEOPROBE 5400				

KLEINFELDER
 4835 Longley Lane
 Reno, NV 89502
 PH. (775) 689-7800 Fax (775) 689-7810
 www.kleinfelder.com


**HOMWOOD GROUNDWATER INVESTIGATION
 HOMWOOD, CALIFORNIA**

PLATE

32

PROJECT NO. 74407.01

LOG OF GP-18

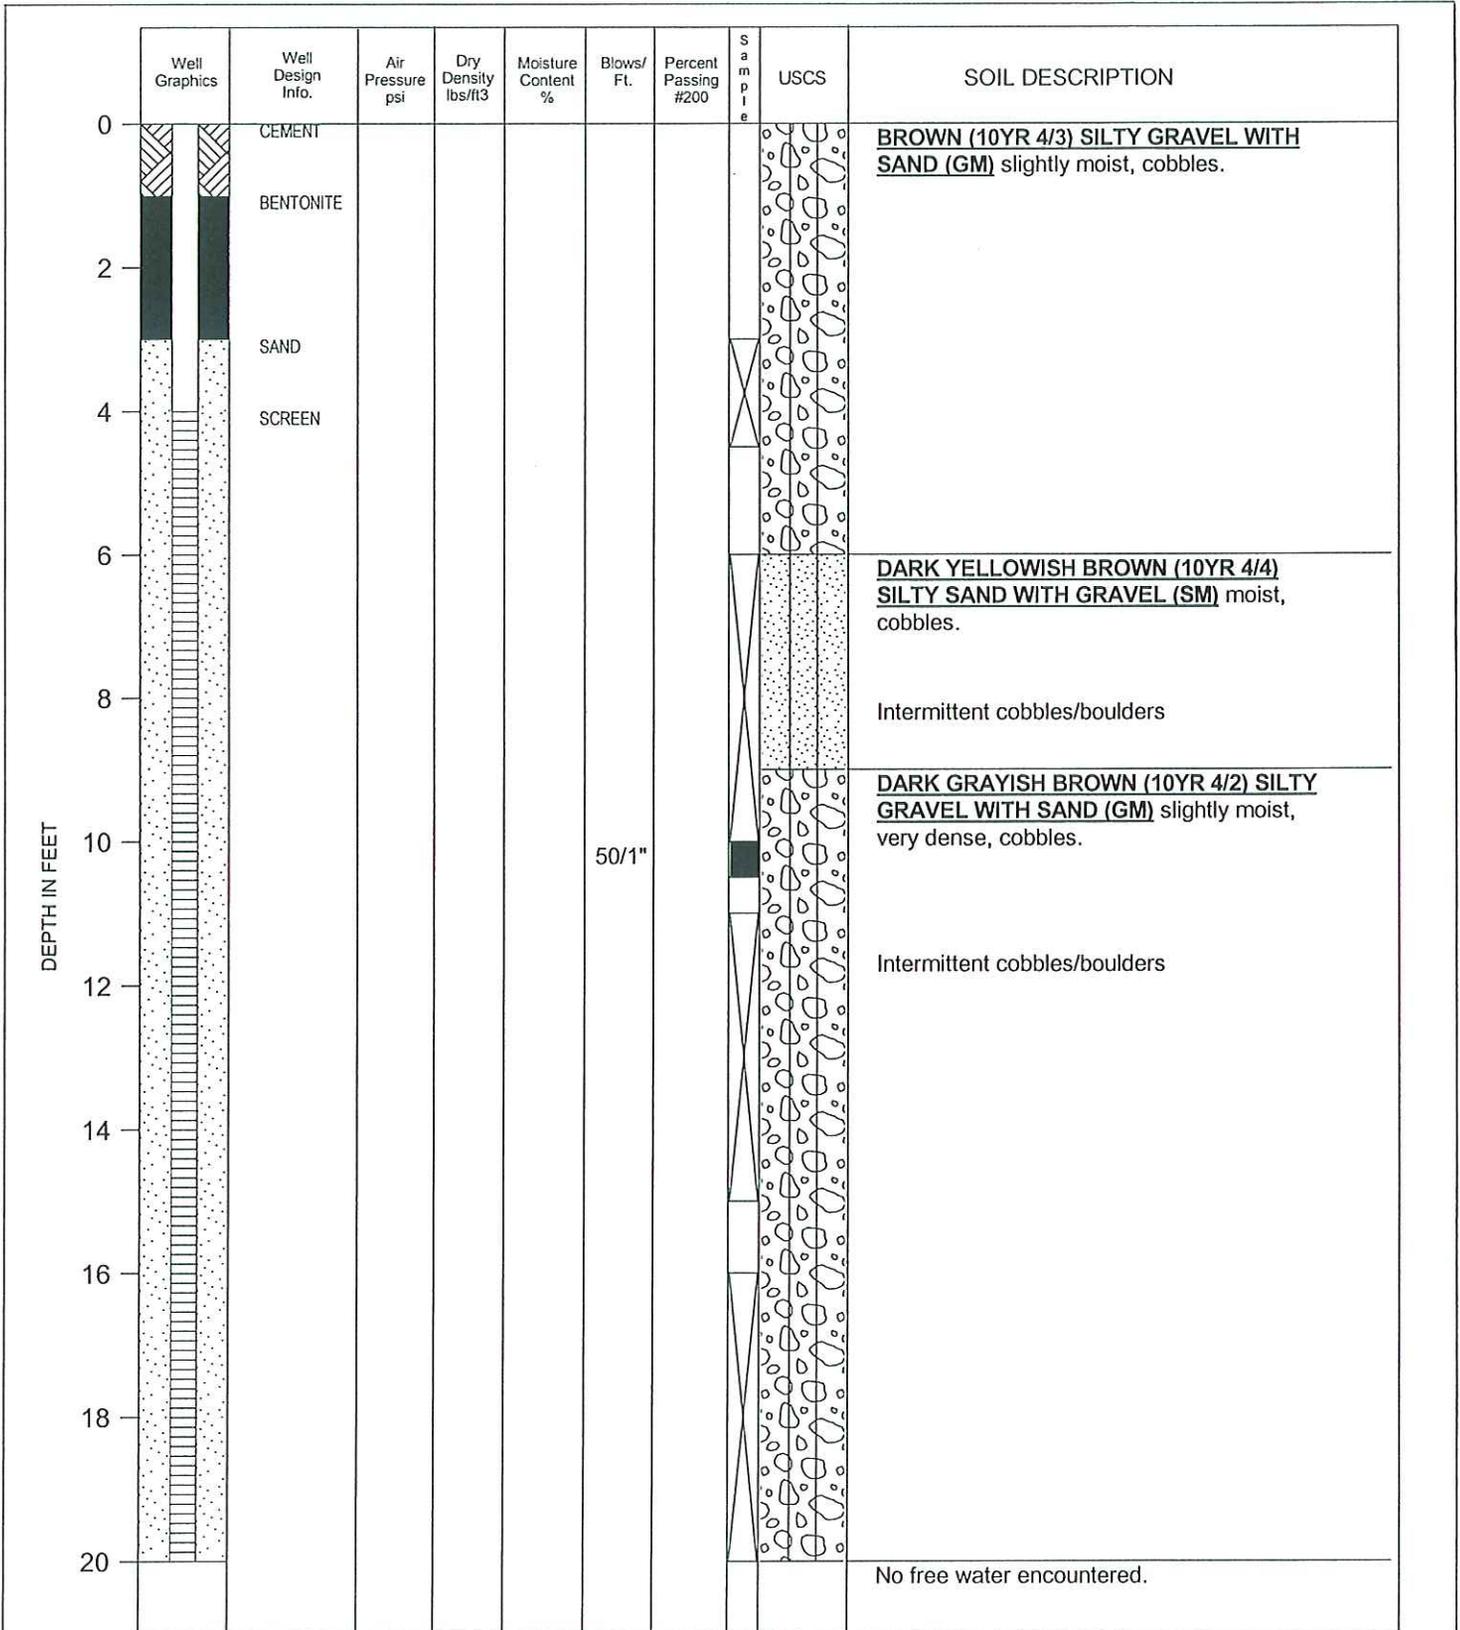

DATE: 10-3-06
TOTAL DEPTH: 20.0 feet

LOGGED BY: P.TOUSIGNANT
EQUIPMENT: INGERSOLL RAND A-400

KLEINFELDER
4835 Longley Lane
Reno, NV 89502
PH. (775) 689-7800 Fax (775) 689-7810
www.kleinfelder.com


**HOMWOOD GROUNDWATER INVESTIGATION
HOMWOOD, CALIFORNIA**

PLATE

33

PROJECT NO. 74407.01

LOG OF GP-19

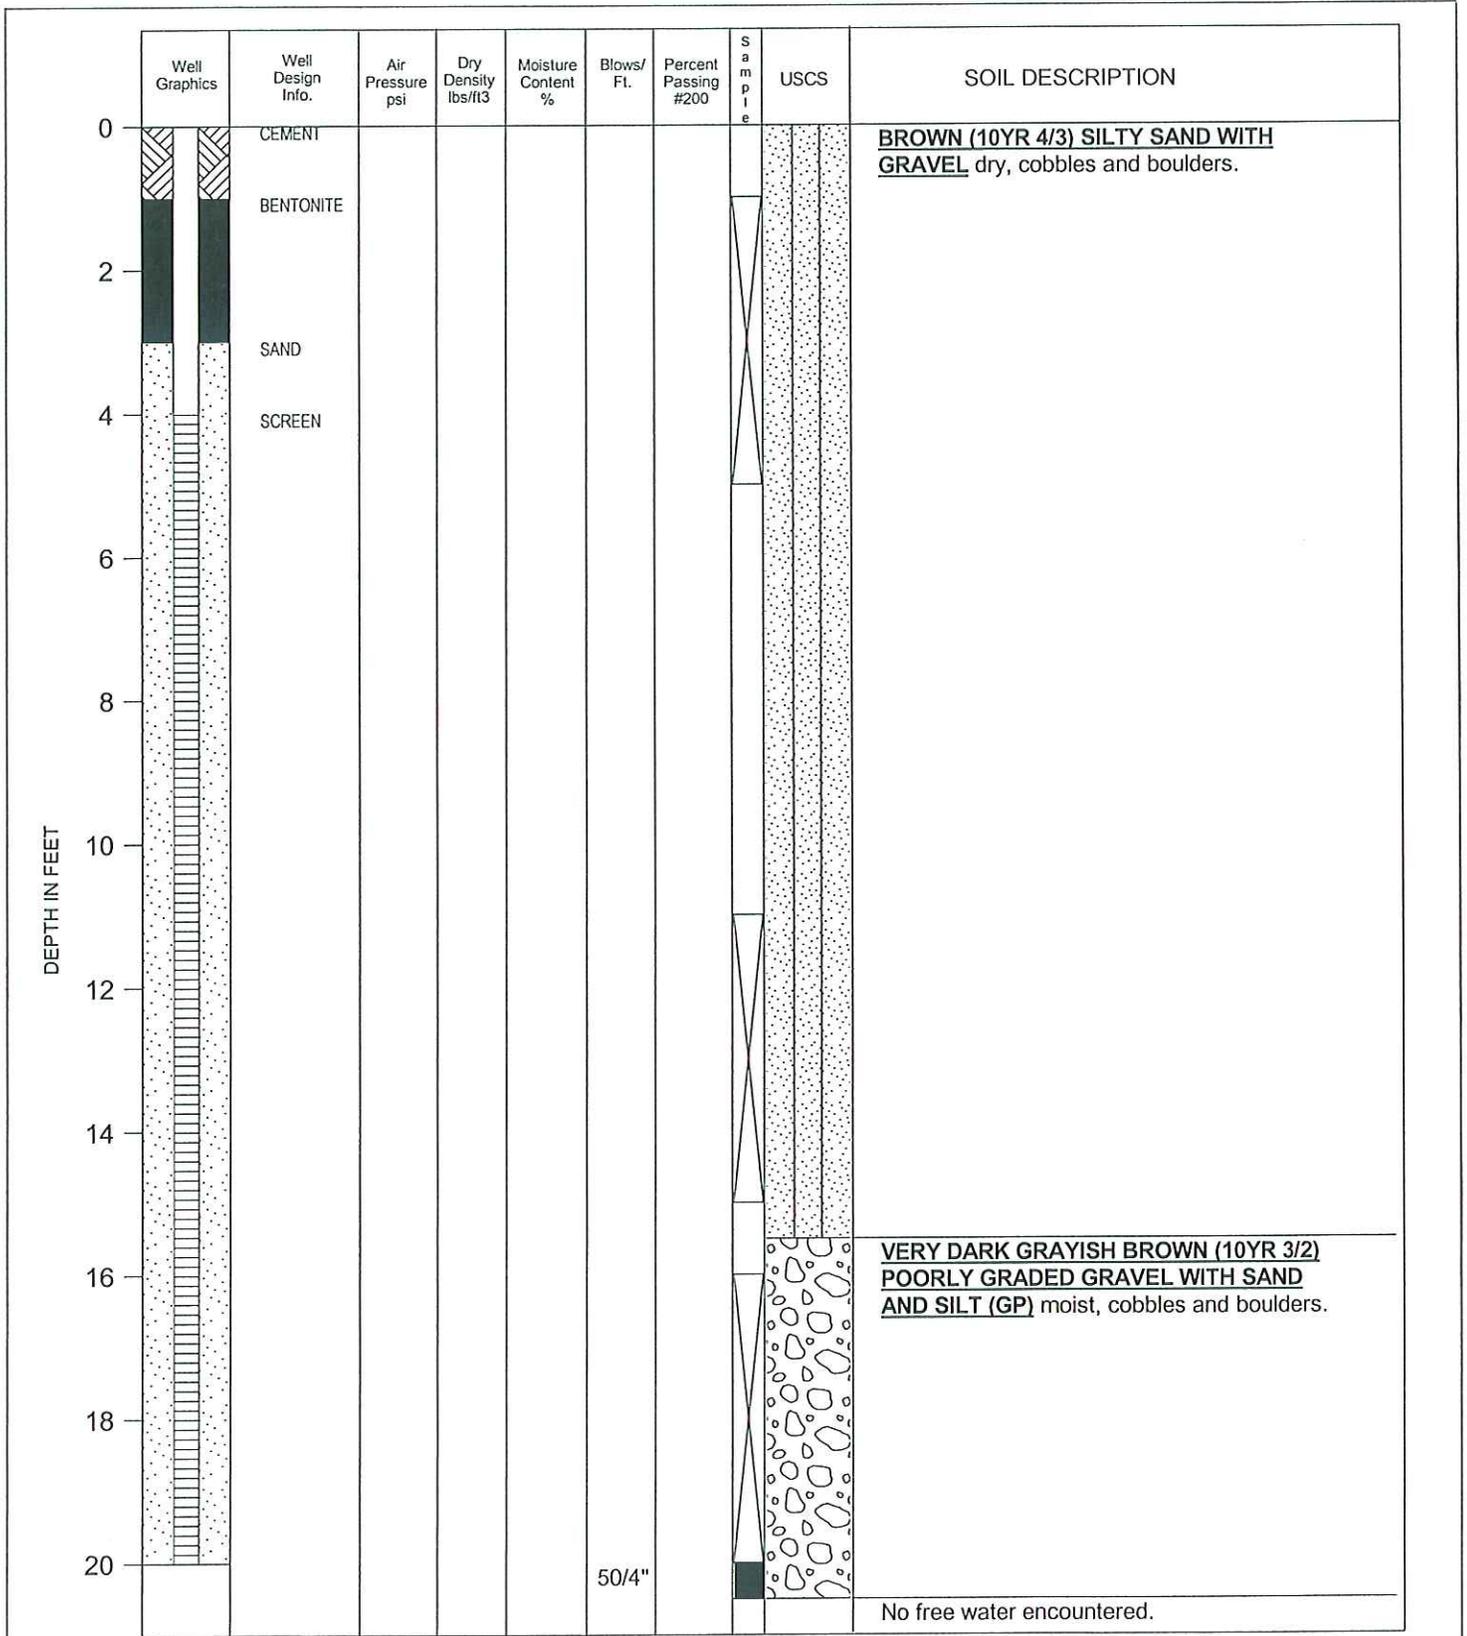

DATE: 10-4-06
TOTAL DEPTH: 20.5 feet

LOGGED BY: P.TOUSIGNANT
EQUIPMENT: INGERSOLL RAND A-400

KLEINFELDER
4835 Longley Lane
Reno, NV 89502
PH. (775) 689-7800 Fax (775) 689-7810
www.kleinfelder.com

PROJECT NO. 74407.01

HOMEWOOD GROUNDWATER INVESTIGATION
HOMEWOOD, CALIFORNIA

LOG OF GP-20

PLATE
34